



SMART LIGHTING



JW LIGHTS IN BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

www.jinwang.com.sg

Experience the art of light with LUMINOUS



Magnetic Track Lights

Effortlessly reposition the lights to suit your evolving needs and preferences. Whether you're creating a dramatic spotlight effect or a soft, ambient glow, our magnetic track lights empower you to transform your space with ease.

Smart Downlights

Customisable and comes with multiple anti-glare reflector options to further enhance the Series' adaptability, allowing you to tailor light distribution and minimise unwanted glare.



COB Lightstrips

Ideal for residential and high-end hotel lighting. LUMINOUS COB LED lightstrips deliver exceptional and uniform illumination with lower heat and a longer lifespan.





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388


Intelligent Control of Color Temperature & Brightness

Our LUMINOUS Lighting more than just illumination; it's a dynamic way to transform you

Enhance your experience with the optional Smart Controller for effortless control.

With Smart App Control, you can easily adjust colour temperature and brightness using your smartphone—creating the perfect ambience for any occasion, from warm and inviting to cool and focused.

Adjust Colour Temperature

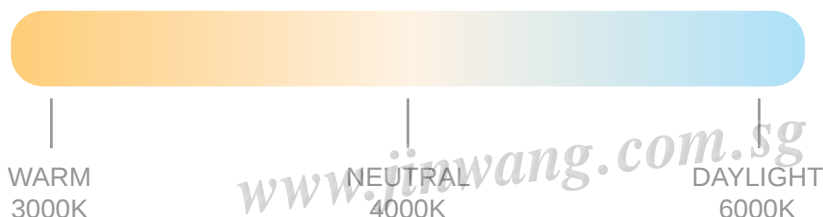

Adjust Brightness

☀ 100%



2.4GHz



Ble & Mesh



zigbee



Gateway User Instructions



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

www.jinwang.com.sg

ULTRA-THIN MAGNETIC TRACK LIGHTS

Smart Ultra-thin Magnetic Track Lights They offer simple, convenient installation, support DIY assembly, and help create a clean, modern spatial aesthetic.

“LUMINOUS” Downlights deliver high-quality lighting performance with elegant and precision.





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

**ULTRA-THIN MAGNETIC
TRACK LIGHTS**

1 | ULTRA-THIN MAGNETIC TRACK LIGHTS

THIN & CUSTOMIZABLE

Experience a sleek, hidden design with a 6mm ultra-thin track.
The light positions can be adjusted freely without ceiling reconstruction.

The track can be installed at any desired length,
and splicing allows extension and rotation up to 30 meters.

Intelligent Radio Frequency Remote Control

- Group Control (supports programming for 4 light groups)
- One-click Switch between Warm Light / Daylight / Cool White Light
- Brightness Adjustment (1-100% stepless dimming for brightness)
- Color Temperature Adjustment 3000-6000K stepless tuning
- Quick Code Pairing/Code Clearing

2.4G Remote Control





JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

ULTRA-THIN MAGNETIC TRACK LIGHTS

LT26-6T-3000K/4000K-Black

LT26-6T-2.4G-Black/White

DIMENSION:	L122xW26xH24mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	382.3 Lm
POWER CONSUMPTION:	6 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	61.7 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G



LT26-12T-3000K/4000K-Black

LT26-12T-2.4G-Black/White

DIMENSION:	L230xW26xH24mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	677.2 Lm
POWER CONSUMPTION:	12 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	61.4 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G



LT26-18T-3000K/4000K-Black

LT26-18T-2.4G-Black/White

DIMENSION:	L338xW26xH24mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	1265.4 Lm
POWER CONSUMPTION:	18 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	59.8 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G



TRACK Grille Light



JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

ULTRA-THIN MAGNETIC TRACK LIGHTS

TRACK Floodlight

LT26-300F-3000K/4000K-Black
LT26-300F-2.4G-Black/White
LT26-300F-3CCT-Black/White

DIMENSION:	L315xW26xH24mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	559.5 Lm
POWER CONSUMPTION:	10 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	51.8 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	150°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G/DIP Switch 3CCT



LT26-600F-3000K/4000K-Black
LT26-600F-2.4G-Black/White
LT26-600F3CCT-Black/White

DIMENSION:	L615xW26xH24mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	1064.3 Lm
POWER CONSUMPTION:	20 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	52.1 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	150°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G/DIP Switch 3CCT



LT26-900F-3000K/4000K-Black
LT26-900F-2.4G-Black/White
LT26-900F-3CCT-Black/White

DIMENSION:	L915xW26xH24mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	1507.7 Lm
POWER CONSUMPTION:	30 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	52.5 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	150°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G/DIP Switch 3CCT





JW LIGHTS m BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

**ULTRA-THIN MAGNETIC
TRACK LIGHTS**

FOLDABLE Track Grille Light



LT26-ZD-6T-3000K/4000K-Black
LT26-ZD-6T-2.4G-Black/White

DIMENSION:	L122xW26xH80mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	382.3 Lm
POWER CONSUMPTION:	6 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	61.7 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G

LT26-ZD-12T-3000K/4000K-Black
LT26-ZD-12T-2.4G-Black/White

DIMENSION:	L230xW26xH80mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	677.2 Lm
POWER CONSUMPTION:	12 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	61.4 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G






JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

**ULTRA-THIN MAGNETIC
TRACK LIGHTS**

FOLDABLE Track Floodlight

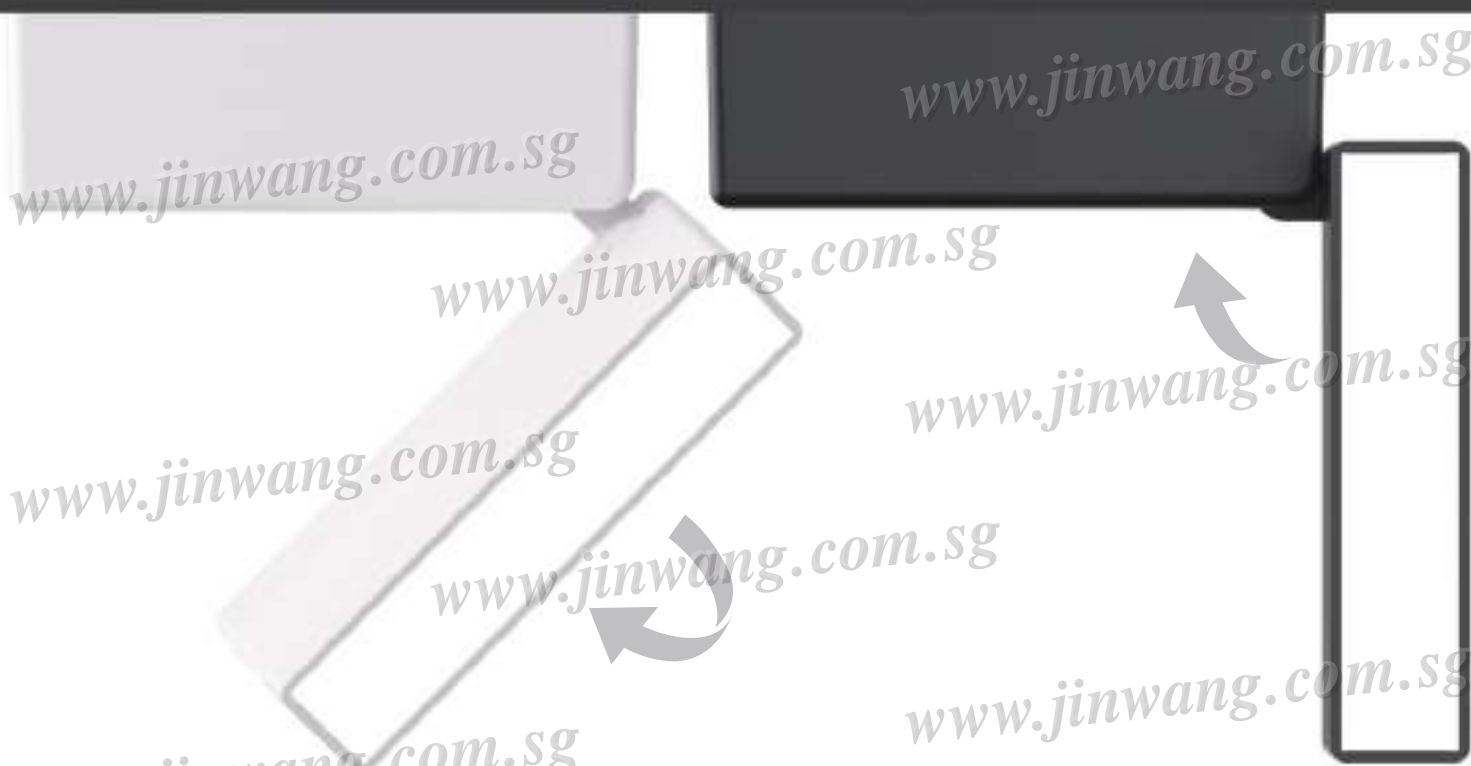

LT26-ZD-6F-3000K/4000K-Black
LT26-ZD-6F-2.4G-Black/White

DIMENSION:	L122xW26xH80mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	265.1Lm
POWER CONSUMPTION:	6 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	44.1 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	150°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G

LT26-ZD-12F-3000K/4000K-Black
LT26-ZD-12F-2.4G-Black/White

DIMENSION:	L230xW26xH80mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	519.3 Lm
POWER CONSUMPTION:	10 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	48.1 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	150°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

**ULTRA-THIN MAGNETIC
TRACK LIGHTS**

ADJUSTABLE Cylinder Spotlights

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg



LT26-YT80-3000K/4000K-Black
LT26-YT80-2.4G-Black/White

DIMENSION:	W80xH75mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	329.7 Lm
POWER CONSUMPTION:	6 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	52.1 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

**ULTRA-THIN MAGNETIC
TRACK LIGHTS**

Track Spotlight



LT26-T44-3000K/4000K-Black
LT26-T44-2.4G-Black/White
LT26-T44-3CCT-Black/White

DIMENSION:	Φ44xH110mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	558.3 Lm
POWER CONSUMPTION:	9 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	62.6 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G/DIP Switch 3CCT

LT26-T55-3000K/4000K-Black
LT26-T55-2.4G-Black/White

DIMENSION:	Φ55xH138mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	1234 Lm
POWER CONSUMPTION:	18 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	65 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G





JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

ULTRA-THIN MAGNETIC TRACK LIGHTS

Pendant Light

LT26-D300-2.4G

Black/White

DIMENSION:	Φ30xH300mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	366.3 Lm
POWER CONSUMPTION:	6 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	57.4 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G



Suspended Hose Floodlight

LT26-GJ-1000-3000K/4000K

Black/White

DIMENSION:	L1000mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	877.4 Lm
POWER CONSUMPTION:	16 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	53.4 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	360°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

ULTRA-THIN MAGNETIC TRACK





6mm Ultra-thin Magnetic Track Strip

Requires no false ceiling and offers a hassle-free installation. Simply screw the track directly to your wall or ceiling.

MODEL LENGTH FUNCTION

LT-26-A	1.5m/2m/3m	6mm-thick magnetic track for track lighting systems
LT-26-A-90°LV	26x26x26mm	vertical 90° track stitching fittings
LT-26-A-I	46x26x6mm	level track stitching fittings
LT-26-A-L	36x36x6mm	level 90° track stitching fittings
LT-26-A-T	46x36x6mm	T track stitching fittings
LT-26-A+	46x46x6mm	+ track stitching fittings

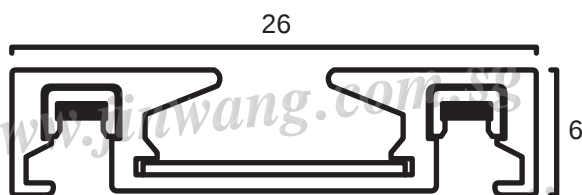

I Connector

LV Connector



26mm

46mm

26mm

26mm




JW LIGHTS m BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

ULTRA-THIN MAGNETIC TRACK

L Connector



T Connector

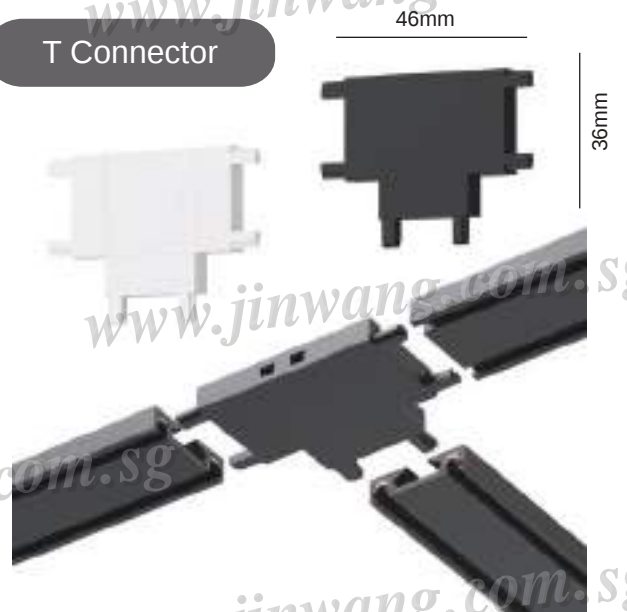

+ Connector



LT26-POWER SUPPLY
Black / White

LENGTH	POWER	INPUT
210x26x24mm	100W	DC 48V
230x26x24mm	200W	DC 48V

LT26-CXH-Wire Box
Black / White

LENGTH. 100x26x29mm



JW LIGHTS m BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

ULTRA-NARROW MAGNETIC TRACK SYSTEM

2 | ULTRA-NARROW MAGNETIC TRACK SYSTEM

The lamp has a safety buckle design with a 10mm ultra-narrow track.
The light positions can be adjusted freely without ceiling reconstruction.

The track can be installed at any desired length,
and splicing allows extension and rotation up to 30 meters.

Intelligent Radio Frequency Remote Control

- Group Control (supports programming for 4 light groups)
- One-click Switch between Warm Light / Daylight / Cool White Light
- Brightness Adjustment (1-100% stepless dimming for brightness)
- Color Temperature Adjustment 3000-6000K stepless tuning
- Quick Code Pairing/Code Clearing

2.4G Remote Control





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

ULTRA-NARROW MAGNETIC TRACK SYSTEM



Grille Light

HS10-12T-BK-2.4G

DIMENSION:	L200xW10xH37mm
MATERIAL:	Aluminum Product
LUMINOUS FLUX:	667.53 Lm
POWER CONSUMPTION:	10 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	63 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	38°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G



HS10-12T-BK-2.4G



HS10-24T-BK-2.4G

HS10-24T-BK-2.4G


DIMENSION:	L400xW10xH37mm
MATERIAL:	Aluminum Product
LUMINOUS FLUX:	1287.9 Lm
POWER CONSUMPTION:	20 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	65.45 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	38°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G





JW LIGHTS m BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

ULTRA-NARROW MAGNETIC TRACK SYSTEM

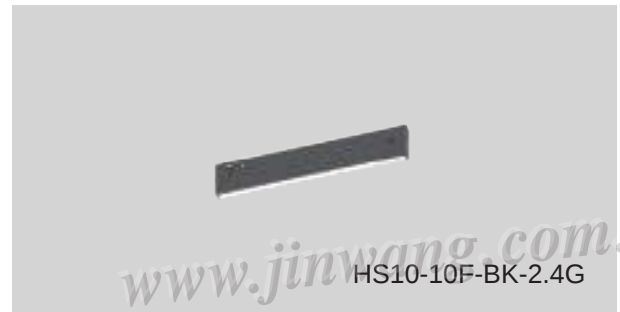

Floodlight Light

HS10-10F-BK-2.4G

DIMENSION:	L200xW10xH37mm
MATERIAL:	Aluminum Product
LUMINOUS FLUX:	420.75 Lm
POWER CONSUMPTION:	10 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	40.17 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	120°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G

HS10-20F-BK-2.4G

DIMENSION:	L400xW10xH37mm
MATERIAL:	Aluminum Product
LUMINOUS FLUX:	840.77 Lm
POWER CONSUMPTION:	20 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	40.88 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	120°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G

HS10-30F-BK-2.4G

DIMENSION:	L600xW10xH37mm
MATERIAL:	Aluminum Product
LUMINOUS FLUX:	1150 Lm
POWER CONSUMPTION:	30 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	41.32 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	120°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

ULTRA-NARROW MAGNETIC TRACK SYSTEM

Folding Grille Light



HS10-ZD-12T-BK-2.4G

DIMENSION:	L200xW10xH73mm
MATERIAL:	Aluminum Product
LUMINOUS FLUX:	667.53 Lm
POWER CONSUMPTION:	10 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	63 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	38°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G





JW LIGHTS m BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

ULTRA-NARROW MAGNETIC TRACK SYSTEM

Folding Floodlight Light



HS10-ZD-10F-BK-2.4G

DIMENSION:	L200xW10xH73mm
MATERIAL:	Aluminum Product
LUMINOUS FLUX:	420.75 Lm
POWER CONSUMPTION:	10 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	40.17 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	120°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G





JW LIGHTS m BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

ULTRA-NARROW MAGNETIC TRACK SYSTEM

Convex spotlight



HS10-1TM-BK-2.4G

DIMENSION:	Φ25xH65mm
MATERIAL:	Aluminum Product
LUMINOUS FLUX:	105.09 Lm
POWER CONSUMPTION:	2 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	39.82 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G

HS10-3TM-BK-2.4G

DIMENSION:	Φ25xL130xH65mm
MATERIAL:	Aluminum Product
LUMINOUS FLUX:	334.73 Lm
POWER CONSUMPTION:	6 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	52.35 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G





JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

ULTRA-NARROW MAGNETIC TRACK SYSTEM



HS10-L20-BK-2.4G



HS10-L33-BK-2.4G



HS10-L43-BK-2.4G

Track Light

HS10-L20-BK-2.4G

DIMENSION:	Φ20xL60mm
MATERIAL:	Aluminum Product
LUMINOUS FLUX:	103.4 Lm
POWER CONSUMPTION:	2 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	33.95 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G

HS10-L33-BK-2.4G

DIMENSION:	Φ33xL85mm
MATERIAL:	Aluminum Product
LUMINOUS FLUX:	374.42 Lm
POWER CONSUMPTION:	6 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	61.34 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G

HS10-L43-BK-2.4G

DIMENSION:	Φ43xL110mm
MATERIAL:	Aluminum Product
LUMINOUS FLUX:	674.29 Lm
POWER CONSUMPTION:	12 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	60.26 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G






JW LIGHTS m BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

ULTRA-NARROW MAGNETIC TRACK SYSTEM

Solar Eclipse Wall Lamp



Solar Eclipse Wall Lamp

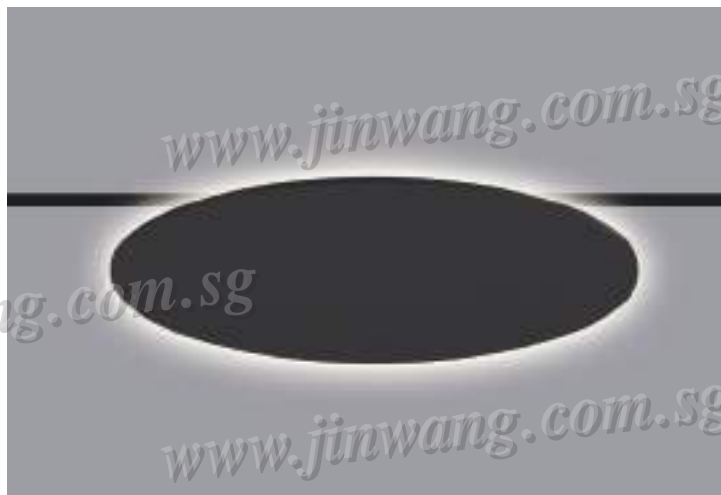

HS10-T33-2-BK-2.4G

DIMENSION:	Φ33xL85mm
MATERIAL:	Aluminum Product
LUMINOUS FLUX:	684.1 Lm
POWER CONSUMPTION:	6 Watt*2
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	58.05 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G



HS10-YSBD-BK-2.4G

DIMENSION:	Φ168xH20mm
MATERIAL:	Aluminum Product
LUMINOUS FLUX:	488.45 Lm
POWER CONSUMPTION:	9 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	46.05 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G





JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

ULTRA-NARROW MAGNETIC TRACK SYSTEM

Spherical Decorative Lamp - Earth



Spherical Pendant light - Earth



HS10-GDD150-BK-2.4G

DIMENSION:	Φ150xH150mm
MATERIAL:	Aluminum Product
LUMINOUS FLUX:	323.8 Lm
POWER CONSUMPTION:	6 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	52.38 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	360°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G



HS10-D150-BK-2.4G

DIMENSION:	Φ150xH150mm
MATERIAL:	Aluminum Product
LUMINOUS FLUX:	323.8 Lm
POWER CONSUMPTION:	6 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	52.38 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	360°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G





JW LIGHTS M BATHROOM


Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

ULTRA-NARROW MAGNETIC TRACK SYSTEM

Surface/Hanging-Track

HS10-C 1M/2M/3M

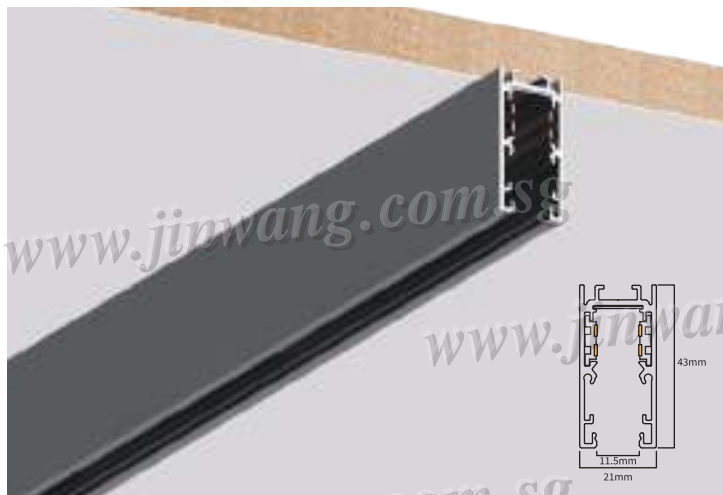

HS10-C-L-BK
Horizontal Angle



HS10-DX9
Hanging wire package

Batch Ash Track

HS10-E 1M/2M/3M



HS10-E-L-BK
Horizontal Angle

220V to 48V Power Supply
HS10-100W-BK/HS10-200W-BK

POWER: 100W / 200W
SIZE: L200xW10xH37mm / L250xW10xH37mm

Input Module
HS10-SRMK-BK

SIZE: L50xW10xH37mm
USE: The end of the line is connected to the external transformer
Module connected to rail strip.

Direct Power Module
HS10-ZJ-BK

SIZE: L120xW10xH37mm
USE: Type I bidirectional conductive module, two straight track
splicing power.

Angle Power Module
HS10-RJ-BK

SIZE: L250xW10xH37mm
USE: L-type Angle conduction module, two tracks splicing power.



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED TRACK LIGHTS

3 | TRACK LIGHTS

Ideal for retail environments and home use, these surface-mounted track lights are designed to highlight spaces and objects with precision. Their directional beams can be easily adjusted to focus on displays, shelves, artwork, or specific product features — enhancing visibility and creating a refined, inviting atmosphere.

Ceiling Recessed / Track Spotlights

- Flexible angle adjustment with 90° vertical tilt, allowing you to set the lighting direction as desired.
- Durable aluminum lamp body with a replaceable light source -easy to install and maintain without damaging the ceiling.
- Available in multiple styles to complement a variety of interior designs and spaces.

GU10-5W-CCT-4





JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED TRACK LIGHTS

www.jinwang.com.sg



801-Black/White

DIMENSION:

Φ53xH80mm

MATERIAL:

Aluminum

HOLDER:

GU10



807-Black/White

DIMENSION:

Φ55xH95mm

MATERIAL:

Aluminum

HOLDER:

GU10



BK+DW

BK+BW



WH+LW

WH+DW

812-BK+DW/BK+BW/WH+LW/WH+DW

DIMENSION:

Φ53xH110mm

MATERIAL:

Aluminum

HOLDER:

GU10





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

LED TRACK LIGHTS



809-BK+RG/WH+RG

DIMENSION: $\Phi 56 \times H100 \text{mm}$
MATERIAL: Aluminum
HOLDER: GU10



813-BK+DW/WH+LW

DIMENSION: $\Phi 55 \times H95 \text{mm}$
MATERIAL: Aluminum
HOLDER: GU10



815-Black/White

DIMENSION: $\Phi 53 \times H80 \text{mm}$
MATERIAL: Aluminum
HOLDER: GU10



816-Black/White

DIMENSION: $\Phi 55 \times H95 \text{mm}$
MATERIAL: Aluminum
HOLDER: GU10





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

LED TRACK LIGHTS



Model 811

Floodlight

Model 810

Grid light



Rotate Left 90°



Unrotated



Rotate Right 90°

810-Black/White

DIMENSION:	L215xW33xH58mm L346xW33xH58mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	678 Lm / 1265.5 Lm
POWER CONSUMPTION:	10 Watt / 20 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	61.5 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K

811-Black/White

DIMENSION:	L345xW33xH58mm L478xW33xH58mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	1065 Lm / 1510.7 Lm
POWER CONSUMPTION:	20 Watt / 30 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	52.3 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	150°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/6000K



6203-Track Black / White

LENGTH:	1M/1.5M/2M/3M
MATERIAL:	Aluminum





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

ANTI-GLARE

SMART

www.jinwang.com.sg

www.jinwang.com.sg

DOWNLIGHTS

www.jinwang.com.sg

Smart downlights enhance aesthetics by providing focused illumination that accentuates architectural details and textures. Whether it's for your living room or bedroom, LUMINOUS Downlights deliver high-quality lighting that elevates your space.

www.jinwang.com.sg





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

**LED SMART
DOWNLIGHTS**

1 | SMART DOWNLIGHT FITTINGS

Intelligent Power Driver

The following power drivers can be installed according to personal needs or different scenarios.



2.4G-Drive



MCCT-Drive

With Memory Function



Zigbee-Drive



R-Ble&Mesh-Drive

Bluetooth+Tuya



Ble&Mesh-Drive

Bluetooth+Tuya





JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED SMART DOWNLIGHTS



719-WH+BK-10W-CCT/2.4G

DIMENSION:	Φ58xH60mm
CUT HOLE:	Φ50mm
LUMINOUS FLUX:	1250 Lm
POWER CONSUMPTION:	10 Watt
COLOR RENDERING:	Ra>97
LUMEN PER WATT:	125 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	36°
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G

720-WH+WH-7W-CCT/2.4G

DIMENSION:	Φ94xH68mm
CUT HOLE:	Φ56mm
LUMINOUS FLUX:	875 Lm
POWER CONSUMPTION:	7 Watt
COLOR RENDERING:	Ra>97
LUMEN PER WATT:	125 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	36°
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G

721-WH+WH-7W-CCT/2.4G

DIMENSION:	Φ85xH55mm
CUT HOLE:	Φ75mm
LUMINOUS FLUX:	840 Lm
POWER CONSUMPTION:	7 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	120 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	36°
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G

719-WH+BK-12W-CCT/2.4G

DIMENSION:	Φ70xH65mm
CUT HOLE:	Φ55mm
LUMINOUS FLUX:	1500 Lm
POWER CONSUMPTION:	12 Watt
COLOR RENDERING:	Ra>97
LUMEN PER WATT:	125 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	36°
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G

720-WH+WH-12W-CCT/2.4G

DIMENSION:	Φ117xH84mm
CUT HOLE:	Φ78mm
LUMINOUS FLUX:	1500 Lm
POWER CONSUMPTION:	12 Watt
COLOR RENDERING:	Ra>97
LUMEN PER WATT:	125 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	36°
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G

721-WH+WH-12W-CCT/2.4G

DIMENSION:	Φ101xH65mm
CUT HOLE:	Φ90mm
LUMINOUS FLUX:	1500 Lm
POWER CONSUMPTION:	12 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	120 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	36°
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED SMART DOWNLIGHTS



725-WH-10W
3000K/4000K/65000K/CCT/MCCT/2.4G

DIMENSION: $\Phi 105 \times H50 \text{mm}$
CUT HOLE: $\Phi 90 \text{mm}$
LUMINOUS FLUX: 1200 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEM: 3000K/4000K/6500K/CCT
SMART MODULE: 2.4G

723-WH+BK-12W-2.5"-CCT/MCCT/2.4G
723-WH+WH-12W-2.5"-CCT/MCCT/2.4G

DIMENSION: $\Phi 85 \times H64 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

725-WH-15W-CCT/MCCT/2.4G

DIMENSION: $\Phi 130 \times H58 \text{mm}$
CUT HOLE: $\Phi 120 \text{mm}$
LUMINOUS FLUX: 1800 Lm
POWER CONSUMPTION: 15 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

727-WH+SR-12W-CCT/MCCT/2.4G
727-WH+BK-12W-CCT/MCCT/2.4G

DIMENSION: $\Phi 85 \times H85 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED SMART DOWNLIGHTS



693-1L-WH-10W-CCT/MCCT/2.4G
693-1L-BK-10W-CCT/MCCT/2.4G



DIMENSION: $\Phi 88 \times H 33 \text{ mm}$
CUT HOLE: $\Phi 75 \text{ mm}$
LUMINOUS FLUX: 1250 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

693-2L-WH-15W-CCT/MCCT/2.4G
693-2L-BK-15W-CCT/MCCT/2.4G



DIMENSION: $L 177 \times W 88 \times H 33 \text{ mm}$
CUT HOLE: $L 160 \times H 75 \text{ mm}$
LUMINOUS FLUX: 1875 Lm
POWER CONSUMPTION: 15 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED SMART DOWNLIGHTS



772-WH-12W-CCT/MCCT/2.4G
772-BK-12W-CCT/MCCT/2.4G



778-WH-12W-CCT/MCCT/2.4G



779-WH-12W-CCT/MCCT/2.4G
779-BK-12W-CCT/MCCT/2.4G



DIMENSION: $\Phi 85 \times H 77 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 82 \times H 51 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 100 \times H 65 \text{mm}$
CUT HOLE: $\Phi 90 \text{mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G



786-WH-12W-CCT/MCCT/2.4G



790-WH-10W-CCT/MCCT/2.4G



791-WH-12W-CCT/MCCT/2.4G



DIMENSION: $\Phi 82 \times H 60 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 85 \times H 58 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
LUMINOUS FLUX: 1250 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 85 \times H 78 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G



JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED SMART DOWNLIGHTS

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

780-1G-WH-12W-CCT/2.4G
780-1G-BK-12W-CCT/2.4G



DIMENSION: $\Phi 85 \times H 85 \text{mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $R_a > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 60°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

780-2G-WH-24W-CCT/2.4G
780-2G-BK-24W-CCT/2.4G



DIMENSION: $L 220 \times \Phi 85 \times H 88 \text{mm}$
LUMINOUS FLUX: 3000 Lm
POWER CONSUMPTION: 24 Watt
COLOR RENDERING: $R_a > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 60°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G



JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED SMART DOWNLIGHTS



763-WH-10W-CCT/2.4G
763-BK-10W-CCT/2.4G



765-WH-10W-CCT/2.4G
765-BK-10W-CCT/2.4G



793-WH-10W-CCT/2.4G
793-BK-10W-CCT/2.4G



DIMENSION: $\Phi 85 \times H 88 \text{mm}$
LUMINOUS FLUX: 1200 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: $R_a > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 100°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 83 \times H 85 \text{mm}$
LUMINOUS FLUX: 1200 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: $R_a > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 100°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 90 \times H 70 \text{mm}$
LUMINOUS FLUX: 1250 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: $R_a > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 120°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G



781-WH-12W-CCT/2.4G
781-BK-12W-CCT/2.4G



782-WH-12W-CCT/2.4G
782-BK-12W-CCT/2.4G



783-WH-12W-CCT/2.4G
783-BK-12W-CCT/2.4G



DIMENSION: $\Phi 85 \times H 100 \text{mm}$
LUMINOUS FLUX: 1440 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $R_a > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 87 \times H 110 \text{mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $R_a > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 87 \times H 110 \text{mm}$
LUMINOUS FLUX: 1440 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $R_a > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G



JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED DOWNLIGHTS



www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

711-WH-12W-CCT/MCCT/2.4G
711-BK-12W-CCT/MCCT/2.4G



713-WH-12W-CCT/MCCT/2.4G
713-BK-12W-CCT/MCCT/2.4G



715-WH-12W-CCT/MCCT/2.4G
715-BK-12W-CCT/MCCT/2.4G



DIMENSION: $\Phi 120 \times H70 \text{mm}$
LUMINOUS FLUX: 1440 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $R_a > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 120°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 120 \times H75 \text{mm}$
LUMINOUS FLUX: 1440 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $R_a > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 120°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 120 \times H65 \text{mm}$
LUMINOUS FLUX: 1440 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $R_a > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 120°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G



JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED DOWNLIGHTS



350°Rotation

60°Selective Folding



360°Rotation

90°Vertical adjustment

716-WH-8W-RGB
716-BK-8W-RGB



DIMENSION: L150xW150xH30mm
LUMINOUS FLUX: 1000 Lm
POWER CONSUMPTION: 8 Watt
COLOR RENDERING: Ra>97
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: COB
BEAM ANGLE: 36°
COLOR TEMPERATURE: RGB

771-WH-8W-CCT/MCCT/2.4G
771-BK-8W-CCT/MCCT/2.4G



DIMENSION: Φ85xH67.5mm
CUT HOLE: Φ75mm
LUMINOUS FLUX: 1000 Lm
POWER CONSUMPTION: 8 Watt
COLOR RENDERING: Ra>97
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: COB
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G



JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED DOWNLIGHTS

www.jinwang.com.sg



750-5L-WH-10W-3000K/4000K
750-5L-BK-10W-3000K/4000K

750-10L-WH-20W-3000K/4000K
750-10L-BK-20W-3000K/4000K

DIMENSION: L165xW62xH50mm
CUT HOLE: L155xW55mm
LUMINOUS FLUX: 1250 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: Ra>97
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 75°
COLOR TEMPERATURE: 3000K/4000K

DIMENSION: L298xW65xH50mm
CUT HOLE: L290xW55mm
LUMINOUS FLUX: 2500 Lm
POWER CONSUMPTION: 20 Watt
COLOR RENDERING: Ra>97
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 75°
COLOR TEMPERATURE: 3000K/4000K



751-5L-WH-10W-3000K/4000K
751-5L-BK-10W-3000K/4000K

751-10L-WH-20W-3000K/4000K
751-10L-BK-20W-3000K/4000K

DIMENSION: L136xW35xH65mm
LUMINOUS FLUX: 1250 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: Ra>97
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 75°
COLOR TEMPERATURE: 3000K/4000K

DIMENSION: L270xW35xH65mm
LUMINOUS FLUX: 2500 Lm
POWER CONSUMPTION: 20 Watt
COLOR RENDERING: Ra>97
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 75°
COLOR TEMPERATURE: 3000K/4000K





JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED DOWNLIGHTS

www.jinwang.com.sg

www.jinwang.com.sg



www.jinwang.com.sg



www.jinwang.com.sg



266-WH-9W-3000K/4100K/6500K

DIMENSION: $\Phi 120 \times H30 \text{mm}$
CUT HOLE: $\Phi 95 \text{mm}$
LUMINOUS FLUX: 1080 Lm
POWER CONSUMPTION: 9 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 120°
COLOR TEM: 3000K/4100K/6500K



266-WH-13W-3000K/4100K/6500K

DIMENSION: $\Phi 145 \times H30 \text{mm}$
CUT HOLE: $\Phi 120 \text{mm}$
LUMINOUS FLUX: 1560 Lm
POWER CONSUMPTION: 13 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 120°
COLOR TEM: 3000K/4100K/6500K



366-WH-9W-3000K/4100K/6500K

DIMENSION: $L120 \times W120 \times H30 \text{mm}$
CUT HOLE: $L105 \times H105 \text{mm}$
LUMINOUS FLUX: 1080 Lm
POWER CONSUMPTION: 9 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 120°
COLOR TEM: 3000K/4100K/6500K



366-WH-13W-3000K/4100K/6500K

DIMENSION: $L150 \times W150 \times H30 \text{mm}$
CUT HOLE: $L135 \times H135 \text{mm}$
LUMINOUS FLUX: 1560 Lm
POWER CONSUMPTION: 13 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 120°
COLOR TEM: 3000K/4100K/6500K



www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED SMART DOWNLIGHTS



719-WH+BK-10W-CCT/2.4G

DIMENSION:	Φ58xH60mm
CUT HOLE:	Φ50mm
LUMINOUS FLUX:	1250 Lm
POWER CONSUMPTION:	10 Watt
COLOR RENDERING:	Ra>97
LUMEN PER WATT:	125 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	36°
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G

720-WH+WH-7W-CCT/2.4G

DIMENSION:	Φ94xH68mm
CUT HOLE:	Φ56mm
LUMINOUS FLUX:	875 Lm
POWER CONSUMPTION:	7 Watt
COLOR RENDERING:	Ra>97
LUMEN PER WATT:	125 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	36°
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G

721-WH+WH-7W-CCT/2.4G

DIMENSION:	Φ85xH55mm
CUT HOLE:	Φ75mm
LUMINOUS FLUX:	840 Lm
POWER CONSUMPTION:	7 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	120 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	36°
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G

719-WH+BK-12W-CCT/2.4G

DIMENSION:	Φ70xH65mm
CUT HOLE:	Φ55mm
LUMINOUS FLUX:	1500 Lm
POWER CONSUMPTION:	12 Watt
COLOR RENDERING:	Ra>97
LUMEN PER WATT:	125 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	36°
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G

720-WH+WH-12W-CCT/2.4G

DIMENSION:	Φ117xH84mm
CUT HOLE:	Φ78mm
LUMINOUS FLUX:	1500 Lm
POWER CONSUMPTION:	12 Watt
COLOR RENDERING:	Ra>97
LUMEN PER WATT:	125 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	36°
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G

721-WH+WH-12W-CCT/2.4G

DIMENSION:	Φ101xH65mm
CUT HOLE:	Φ90mm
LUMINOUS FLUX:	1500 Lm
POWER CONSUMPTION:	12 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	120 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	36°
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G



JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED SMART DOWNLIGHTS



725-WH-10W
3000K/4000K/6500K/CCT/MCCT/2.4G

DIMENSION: $\Phi 105 \times H50 \text{ mm}$
CUT HOLE: $\Phi 90 \text{ mm}$
LUMINOUS FLUX: 1200 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEM: 3000K/4000K/6500K/CCT
SMART MODULE: 2.4G

723-WH+BK-12W-2.5"-CCT/MCCT/2.4G
723-WH+WH-12W-2.5"-CCT/MCCT/2.4G

DIMENSION: $\Phi 85 \times H64 \text{ mm}$
CUT HOLE: $\Phi 75 \text{ mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

725-WH-15W-CCT/MCCT/2.4G

DIMENSION: $\Phi 130 \times H58 \text{ mm}$
CUT HOLE: $\Phi 120 \text{ mm}$
LUMINOUS FLUX: 1800 Lm
POWER CONSUMPTION: 15 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

727-WH+SR-12W-CCT/MCCT/2.4G
727-WH+BK-12W-CCT/MCCT/2.4G

DIMENSION: $\Phi 85 \times H85 \text{ mm}$
CUT HOLE: $\Phi 75 \text{ mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G



JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

**LED SMART
DOWNLIGHTS**

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

693-1L-WH-10W-CCT/MCCT/2.4G
693-1L-BK-10W-CCT/MCCT/2.4G



DIMENSION: $\Phi 88 \times H33 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
LUMINOUS FLUX: 1250 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

693-2L-WH-15W-CCT/MCCT/2.4G
693-2L-BK-15W-CCT/MCCT/2.4G



DIMENSION: $L177 \times W88 \times H33 \text{mm}$
CUT HOLE: $L160 \times H75 \text{mm}$
LUMINOUS FLUX: 1875 Lm
POWER CONSUMPTION: 15 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

www.jinwang.com.sg

www.jinwang.com.sg



JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

LED SMART DOWNLIGHTS

www.jinwang.com.sg

www.jinwang.com.sg



772-WH-12W-CCT/MCCT/2.4G
772-BK-12W-CCT/MCCT/2.4G



778-WH-12W-CCT/MCCT/2.4G



779-WH-12W-CCT/MCCT/2.4G
779-BK-12W-CCT/MCCT/2.4G



DIMENSION: $\Phi 85 \times H 77 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 82 \times H 51 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 100 \times H 65 \text{mm}$
CUT HOLE: $\Phi 90 \text{mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G



786-WH-12W-CCT/MCCT/2.4G



790-WH-10W-CCT/MCCT/2.4G



791-WH-12W-CCT/MCCT/2.4G



DIMENSION: $\Phi 82 \times H 60 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 85 \times H 58 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
LUMINOUS FLUX: 1250 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 85 \times H 78 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED SMART DOWNLIGHTS

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

780-1G-WH-12W-CCT/2.4G
780-1G-BK-12W-CCT/2.4G



DIMENSION: $\Phi 85 \times H 85 \text{mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 60°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

780-2G-WH-24W-CCT/2.4G
780-2G-BK-24W-CCT/2.4G



DIMENSION: $L 220 \times \Phi 85 \times H 88 \text{mm}$
LUMINOUS FLUX: 3000 Lm
POWER CONSUMPTION: 24 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 60°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

www.jinwang.com.sg

www.jinwang.com.sg



JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

LED SMART DOWNLIGHTS



763-WH-10W-CCT/2.4G
763-BK-10W-CCT/2.4G



765-WH-10W-CCT/2.4G
765-BK-10W-CCT/2.4G



793-WH-10W-CCT/2.4G
793-BK-10W-CCT/2.4G



DIMENSION: $\Phi 85 \times H 88 \text{mm}$
LUMINOUS FLUX: 1200 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 100°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 83 \times H 85 \text{mm}$
LUMINOUS FLUX: 1200 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 100°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 90 \times H 70 \text{mm}$
LUMINOUS FLUX: 1250 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 120°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G



781-WH-12W-CCT/2.4G
781-BK-12W-CCT/2.4G



782-WH-12W-CCT/2.4G
782-BK-12W-CCT/2.4G



783-WH-12W-CCT/2.4G
783-BK-12W-CCT/2.4G



DIMENSION: $\Phi 85 \times H 100 \text{mm}$
LUMINOUS FLUX: 1440 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 87 \times H 110 \text{mm}$
LUMINOUS FLUX: 1500 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

DIMENSION: $\Phi 87 \times H 110 \text{mm}$
LUMINOUS FLUX: 1440 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED DOWNLIGHTS



711-WH-12W-CCT/MCCT/2.4G
711-BK-12W-CCT/MCCT/2.4G



DIMENSION: $\Phi 120 \times H 70 \text{mm}$
LUMINOUS FLUX: 1440 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $R_a > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 120°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

713-WH-12W-CCT/MCCT/2.4G
713-BK-12W-CCT/MCCT/2.4G



DIMENSION: $\Phi 120 \times H 75 \text{mm}$
LUMINOUS FLUX: 1440 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $R_a > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 120°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

715-WH-12W-CCT/MCCT/2.4G
715-BK-12W-CCT/MCCT/2.4G



DIMENSION: $\Phi 120 \times H 65 \text{mm}$
LUMINOUS FLUX: 1440 Lm
POWER CONSUMPTION: 12 Watt
COLOR RENDERING: $R_a > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 120°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G



JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

**LED
DOWNLIGHTS**



www.jinwang.com.sg

www.jinwang.com.sg



716-WH-8W-RGB
716-BK-8W-RGB



DIMENSION: L150xW150xH30mm
LUMINOUS FLUX: 1000 Lm
POWER CONSUMPTION: 8 Watt
COLOR RENDERING: Ra>97
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: COB
BEAM ANGLE: 36°
COLOR TEMPERATURE: RGB



771-WH-8W-CCT/MCCT/2.4G
771-BK-8W-CCT/MCCT/2.4G



DIMENSION: $\Phi 85 \times H67.5 \text{ mm}$
CUT HOLE: $\Phi 75 \text{ mm}$
LUMINOUS FLUX: 1000 Lm
POWER CONSUMPTION: 8 Watt
COLOR RENDERING: Ra>97
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: COB
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT
SMART MODULE: 2.4G

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg



JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED DOWNLIGHTS



750-5L-WH-10W-3000K/4000K
750-5L-BK-10W-3000K/4000K

DIMENSION:	L165xW62xH50mm
CUT HOLE:	L155xW55mm
LUMINOUS FLUX:	1250 Lm
POWER CONSUMPTION:	10 Watt
COLOR RENDERING:	Ra>97
LUMEN PER WATT:	125 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	75°
COLOR TEMPERATURE:	3000K/4000K

750-10L-WH-20W-3000K/4000K
750-10L-BK-20W-3000K/4000K

DIMENSION:	L298xW65xH50mm
CUT HOLE:	L290xW55mm
LUMINOUS FLUX:	2500 Lm
POWER CONSUMPTION:	20 Watt
COLOR RENDERING:	Ra>97
LUMEN PER WATT:	125 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	75°
COLOR TEMPERATURE:	3000K/4000K



751-5L-WH-10W-3000K/4000K
751-5L-BK-10W-3000K/4000K

DIMENSION:	L136xW35xH65mm
LUMINOUS FLUX:	1250 Lm
POWER CONSUMPTION:	10 Watt
COLOR RENDERING:	Ra>97
LUMEN PER WATT:	125 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	75°
COLOR TEMPERATURE:	3000K/4000K

751-10L-WH-20W-3000K/4000K
751-10L-BK-20W-3000K/4000K

DIMENSION:	L270xW35xH65mm
LUMINOUS FLUX:	2500 Lm
POWER CONSUMPTION:	20 Watt
COLOR RENDERING:	Ra>97
LUMEN PER WATT:	125 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	75°
COLOR TEMPERATURE:	3000K/4000K





JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED DOWNLIGHTS



www.jinwang.com.sg

www.jinwang.com.sg



266-WH-9W-3000K/4100K/6500K

DIMENSION: $\Phi 120 \times H30 \text{mm}$
CUT HOLE: $\Phi 95 \text{mm}$
LUMINOUS FLUX: 1080 Lm
POWER CONSUMPTION: 9 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 120°
COLOR TEM: 3000K/4100K/6500K



266-WH-13W-3000K/4100K/6500K

DIMENSION: $\Phi 145 \times H30 \text{mm}$
CUT HOLE: $\Phi 120 \text{mm}$
LUMINOUS FLUX: 1560 Lm
POWER CONSUMPTION: 13 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 120°
COLOR TEM: 3000K/4100K/6500K



366-WH-9W-3000K/4100K/6500K

DIMENSION: $L120 \times W120 \times H30 \text{mm}$
CUT HOLE: $L105 \times H105 \text{mm}$
LUMINOUS FLUX: 1080 Lm
POWER CONSUMPTION: 9 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 120°
COLOR TEM: 3000K/4100K/6500K



366-WH-13W-3000K/4100K/6500K

DIMENSION: $L150 \times W150 \times H30 \text{mm}$
CUT HOLE: $L135 \times H135 \text{mm}$
LUMINOUS FLUX: 1560 Lm
POWER CONSUMPTION: 13 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 120°
COLOR TEM: 3000K/4100K/6500K





JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED DOWNLIGHTS



761-WH-5W-3000K/4000K
761-BK-5W-3000K/4000K



761-WH-7W-3000K/4000K
761-BK-7W-3000K/4000K



761-WH-10W-MCCT



DIMENSION: $\Phi 50 \times H 48 \text{ mm}$
CUT HOLE: $\Phi 45 \text{ mm}$
LUMINOUS FLUX: 625 Lm
POWER CONSUMPTION: 5 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: 3000K/4000K

DIMENSION: $\Phi 63 \times H 62 \text{ mm}$
CUT HOLE: $\Phi 55 \text{ mm}$
LUMINOUS FLUX: 875 Lm
POWER CONSUMPTION: 7 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: 3000K/4000K

DIMENSION: $\Phi 83 \times H 76 \text{ mm}$
CUT HOLE: $\Phi 75 \text{ mm}$
LUMINOUS FLUX: 1250 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 36°
COLOR TEMPERATURE: CCT



695-WH+WH-3W-3000K/4000K



DIMENSION: $\Phi 40 \times H 29 \text{ mm}$
CUT HOLE: $\Phi 35 \text{ mm}$
LUMINOUS FLUX: 375 Lm
POWER CONSUMPTION: 3 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: OSRAM
BEAM ANGLE: 24°
COLOR TEMPERATURE: 3000K/4000K

696-WH-2W-3000K/4000K/6000K
696-BK-2W-3000K/4000K/6000K



DIMENSION: $\Phi 30 \times H 50 \text{ mm}$
CUT HOLE: $\Phi 25 \text{ mm}$
LUMINOUS FLUX: 250 Lm
POWER CONSUMPTION: 2 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED CHIP: OSRAM
BEAM ANGLE: 24°
COLOR TEMPERATURE: 3000K/4000K/6000K



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED

DOWNLIGHT FITTING

2 | GU10 DOWNLIGHT FITTINGS OPTIC CHOICES

The face ring—the visible contour of a downlight—serves not only as a functional component but also as a defining element of interior style. Its refined matte finish harmonizes effortlessly with modern minimalist décor, blending seamlessly into the ceiling while allowing the light itself to take center stage.

Downlight Face Ring: Illuminating with Elegance

- Designed to unite form and function, each face ring and fitting ensures precise recessed installation while elevating the aesthetic appeal of your space. Every detail is crafted to offer both stability and style, providing a perfect balance between engineering precision and timeless design.
- Available in a variety of styles, these fittings complement diverse interiors—each one enhancing your lighting experience with subtle sophistication and enduring beauty.

GU10-5W-CCT-4





JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

GU10

DOWNLIGHT FITTING



608-RD
WH+BK / WH+RO

LENGTH: $\Phi 90 \times H 50 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
MATERIAL: Aluminum
FITTING: GU10 / LED MODULE



609-RD
White / Black

LENGTH: $\Phi 82 \times H 28 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
MATERIAL: Aluminum
FITTING: GU10 / LED MODULE



615-RD
White

LENGTH: $\Phi 90 \times H 45 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
MATERIAL: Aluminum
FITTING: GU10 / LED MODULE



616-RD
White / Black

LENGTH: $\Phi 90 \times H 45 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
MATERIAL: Aluminum
FITTING: GU10 / LED MODULE



911-RD
WH+BK / WH+RO

LENGTH: $\Phi 90 \times H 45 \text{mm}$
CUT HOLE: $\Phi 75 \text{mm}$
MATERIAL: Aluminum
FITTING: GU10 / LED MODULE



911-SQ
White / Black

LENGTH: $L 90 \times W 90 \times H 45 \text{mm}$
CUT HOLE: $L 75 \times W 75 \text{mm}$
MATERIAL: Aluminum
FITTING: GU10 / LED MODULE





JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

GU10

DOWNLIGHT FITTING



773
White / Black

LENGTH: $\Phi 92 \times H 51.5 \text{ mm}$
CUT HOLE: $\Phi 75 \text{ mm}$
MATERIAL: Aluminum
FITTING: GU10 / LED MODULE



730B
White / Black

LENGTH: $\Phi 70 \times H 100 \text{ mm}$
MATERIAL: Aluminum
FITTING: GU10



731
White / Black

LENGTH: $\Phi 80 \times H 90 \text{ mm}$
MATERIAL: Aluminum
FITTING: GU10



712-H95-RD
White / Black

LENGTH: $\Phi 80 \times H 45 \text{ mm}$
MATERIAL: Aluminum
FITTING: GU10





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

GU10
DOWNLIGHT FITTING



712-H95-SQ
White / Black

LENGTH: L80xW80xH95mm
MATERIAL: Aluminum
FITTING: GU10



712-H95-2G
White / Black

LENGTH: L160xW80xH95mm
MATERIAL: Aluminum
FITTING: GU10



718-1L-White / Black

LENGTH: L100xW100xH100mm
MATERIAL: Aluminum
FITTING: GU10



718-2L-White / Black

LENGTH: L100xW190xH100mm
MATERIAL: Aluminum
FITTING: GU10





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

GU10

DOWNLIGHT FITTING

RECESSED GYPSUM LIGHTS

FRAMELESS SERIES

Seamlessly merging with the ceiling, The Frameless Series creates a "light visible, fixture invisible" effect-an embodiment of understated luxury and architectural purity. The result is illumination that feels natural and effortless, transforming the ceiling into a canvas of light. Every detail is designed for flawless integration and visual harmony, ensuring that the light enhances the ambience while the fixture itself remains elegantly unseen.



Dual Anti-Glare Design

Curved Surface + Deep Recessed Anti-Glare
for Better Eye Protection.



After installation,
the gypsum light blends seamlessly with the ceiling.



630-1L
White

LENGTH: $\Phi 130 \times H65 \text{mm}$
CUT HOLE: $\Phi 135 \text{mm}$
MATERIAL: Gypsum
FITTING: GU10 / LED MODULE



718-2L
White / Black

LENGTH: $L120 \times W240 \times H65 \text{mm}$
CUT HOLE: $135 \times 245 \text{mm}$
MATERIAL: Gypsum
FITTING: GU10 / LED MODULE





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

GU10
DOWNLIGHT FITTING



613-1L-RD
White / Black

LENGTH: $\Phi 92\text{mm}$
CUT HOLE: $\Phi 75\text{mm}$
MATERIAL: Aluminum
FITTING: GU10 / LED MODULE




613-1L-SQ
White / Black

LENGTH: $L92 \times W92\text{mm}$
CUT HOLE: $L75 \times W75\text{mm}$
MATERIAL: Aluminum
FITTING: GU10 / LED MODULE



613-2L
White / Black

LENGTH: $L175 \times W92\text{mm}$
CUT HOLE: $L155 \times W75\text{mm}$
MATERIAL: Aluminum
FITTING: GU10 / LED MODULE



613-3L
White / Black

LENGTH: $L260 \times W92\text{mm}$
CUT HOLE: $L240 \times W75\text{mm}$
MATERIAL: Aluminum
FITTING: GU10 / LED MODULE





JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

GU10

DOWNLIGHT FITTING



788-1L

White / Black

LENGTH: $\Phi 105 \times H 35 \text{mm}$
CUT HOLE: $\Phi 95 \text{mm}$
MATERIAL: Aluminum
FITTING: GU10 / LED MODULE



788-2L

White / Black

LENGTH: $L 208 \times W 106 \times H 43 \text{mm}$
CUT HOLE: $L 190 \times W 95 \text{mm}$
MATERIAL: Aluminum
FITTING: GU10 / LED MODULE





JW LIGHTS m BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

www.jinwang.com.sg

SMART

LED STRIP LIGHT

Uniform and soft light emission without glare; low energy consumption and long service life; easy installation, adhesive or recessed mounting available; supports single-color, dimming/color-adjusting functions.

Indoor decoration (ceilings, skirting boards, cabinet outlines), commercial lighting (shop windows, display cabinets),
ambiance creation (TV backdrops, bedside), outdoor lighting, etc.






JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED STRIP LIGHT

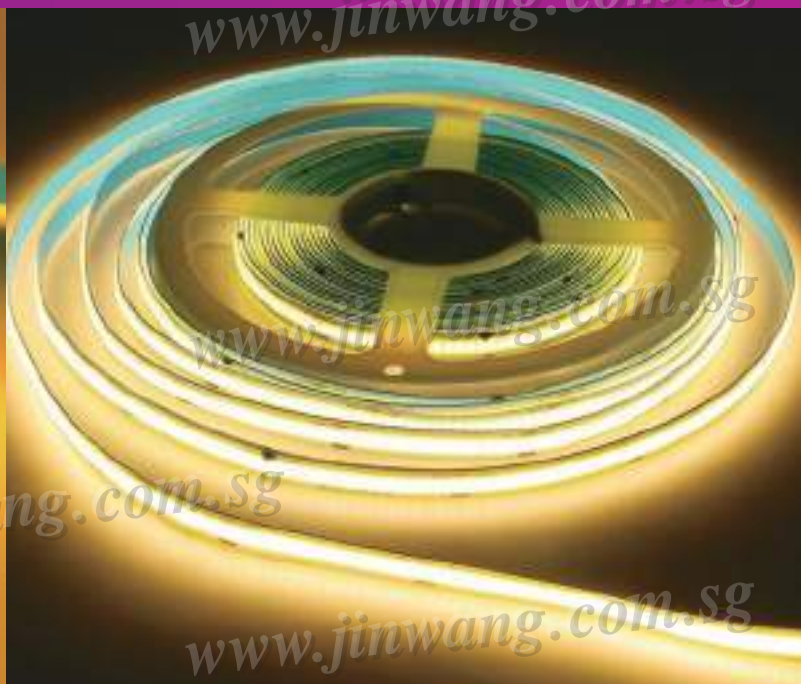


COB 12V-480D-8mm

COB 24V-480D-8mm

3000K/4000K-6500K




WIDTH: 8 mm
LENGTH: 5 M
LED CHIP: COB-480D
POWER CONSUMPTION: 12 W/M
COLOR RENDERING: Ra>90
LUMEN PER WATT: 110 Lm/Watt
INPUT: DC 12V / DC 24V



COB 24V-608D-8mm-CCT



WIDTH: 8 mm
LENGTH: 5 M / 10 M
LED CHIP: COB-608D
POWER CONSUMPTION: 12 W/M
COLOR RENDERING: Ra>90
LUMEN PER WATT: 110 Lm/Watt
INPUT: DC 24V



2835-24V-120D-8mm

3000K / 4000K



WIDTH: 8 mm
LENGTH: 10 M
LED CHIP: OSRAM-120D
POWER CONSUMPTION: 12 W/M
COLOR RENDERING: Ra>80
LUMEN PER WATT: 110 Lm/Watt
INPUT: DC 24V





JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

**LED
STRIP LIGHT**



H-12V-Drive



POWER: 45W / 60W / 100W / 150W / 200W
INPUT: 175-250V 50/60Hz
OUTPUT: DC 12V



H-24V-Drive



POWER: 60W / 100W / 150W / 200W / 400W
INPUT: 175-250V 50/60Hz
OUTPUT: DC 12V



Zigbee-24V-Driver



POWER: 100W / 200W
INPUT: 100-240V 50/60Hz
OUTPUT: DC 24V



2.4G-24V-Driver



POWER: 100W / 150W
INPUT: 180-260V 50/60Hz
OUTPUT: DC 24V



JW LIGHTS m BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

MODERN MINIMALIST LED WALL LAMP

○○○ Eclipse
Wall Lamp
Design



○○○ 300° Adjustable Shade Direction



JW LIGHTS m BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

LED WALL LAMP

www.jinwang.com.sg



MB-232
White / Black

DIMENSION: $\Phi 145 \times H30 \text{mm}$
LUMINOUS FLUX: 1250 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED: SMT+COB
COLOR TEMPERATURE: CCT



MB-233
White / Black

DIMENSION: $L145 \times W145 \times H30 \text{mm}$
LUMINOUS FLUX: 1250 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: $Ra > 97$
LUMEN PER WATT: 125 Lm/Watt
LED: SMT+COB
COLOR TEMPERATURE: CCT



www.jinwang.com.sg



MB-235
White / Black

DIMENSION: $L190 \times W190 \times H60 \text{mm}$
LUMINOUS FLUX: 2160 Lm
POWER CONSUMPTION: 18 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED: SMT
COLOR TEMPERATURE: CCT



MB-236
White / Black

DIMENSION: $\Phi 190 \times H60 \text{mm}$
LUMINOUS FLUX: 2160 Lm
POWER CONSUMPTION: 18 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 120 Lm/Watt
LED: SMT
COLOR TEMPERATURE: CCT





JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED WALL LAMP



MB-237-RD/SQ/RT White / Black

DIMENSION: RD. $\Phi 150 \times H 30 \text{ mm}$
SQ. $L 150 \times W 150 \times H 30 \text{ mm}$
RT. $L 145 \times W 150 \times H 30 \text{ mm}$
LUMINOUS FLUX: 840 Lm
POWER CONSUMPTION: 7 Watt
COLOR RENDERING: Ra > 90
LUMEN PER WATT: 120 Lm/Watt
LED: SMT
COLOR TEMPERATURE: CCT



RD.



SQ.



RT.



MB-238-RD White / Black / Grey

DIMENSION: $\Phi 200 \times H 58 \text{ mm}$
LUMINOUS FLUX: 1200 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: Ra > 90
LUMEN PER WATT: 120 Lm/Watt
LED: SMT
COLOR TEMPERATURE: 3000K



MB-239-RD White / Black / Grey

DIMENSION: $\Phi 230 \times H 110 \text{ mm}$
POWER CONSUMPTION: 6 Watt
FITTING: G9
LED: 88D
COLOR TEMPERATURE: 3000K





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

WOOD-GRAIN Ceiling Light

Brighten the natural living space

○○○



○○○ Soft light Acrylic lampshade



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED CEILING LIGHT



Black



BK+GD



White



WH+GD



WH+GR



GR+GD

3835RD-23W

Black / BK+GD / White / WH+GD / WH+GR / GR+GD

LAMP PLATE:

Φ230mm/3nails

LAMP SHADE:

Φ260mm

LUMINOUS FLUX:

2530 Lm

POWER CONSUMPTION:

23 Watt

COLOR RENDERING:

Ra>90

LUMEN PER WATT:

110 Lm/Watt

COLOR TEMPERATURE:

CCT





JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED CEILING LIGHT



3831RD-23W

White / Black

LAMP PLATE:
LAMP SHADE:
LUMINOUS FLUX:
POWER CONSUMPTION:
COLOR RENDERING:
LUMEN PER WATT:
COLOR TEMPERATURE:

Φ250mm/3nails
Φ280mm
2530 Lm
23 Watt
Ra>90
110 Lm/Watt
CCT



3830SQ-30W

Black / Silvery / Gold



DIMENSION:
LUMINOUS FLUX:
POWER CONSUMPTION:
COLOR RENDERING:
LUMEN PER WATT:
COLOR TEMPERATURE:

L280x280mm
3300 Lm
30 Watt
Ra>90
110 Lm/Watt
CCT





JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED CEILING LIGHT



BK+LW



WH+LW



WH+GD



WH+GR



White



WH+BK

3823RD-23W

BK+LW/WH+LW/WH+GD/WH+GR/WH/WH+BK

LAMP PLATE: $\Phi 230\text{mm}/3\text{nails}$
LAMP SHADE: $\Phi 260\text{mm}$
LUMINOUS FLUX: 2530 Lm
POWER CONSUMPTION: 23 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: 3in1



3823RD-36W

WH+LW/BK+LW/WH+GD

LAMP PLATE: $\Phi 350\text{mm}/4\text{nails}$
LAMP SHADE: $\Phi 390\text{mm}$
LUMINOUS FLUX: 3960 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: 3in1





JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED CEILING LIGHT



3839RD-23W
White / WH+BU

LAMP PLATE:	Φ230mm/3nails
LAMP SHADE:	Φ260mm
LUMINOUS FLUX:	2530 Lm
POWER CONSUMPTION:	23 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	110 Lm/Watt
COLOR TEMPERATURE:	CCT



3832RD-23W
WH+LW / WH+DW

LAMP PLATE:	Φ250mm/3nails
LAMP SHADE:	Φ280mm
LUMINOUS FLUX:	2530 Lm
POWER CONSUMPTION:	23 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	110 Lm/Watt
COLOR TEMPERATURE:	CCT



3832RD-36W
WH+LW / WH+DW

LAMP PLATE:	Φ350mm/3nails
LAMP SHADE:	Φ410mm
LUMINOUS FLUX:	3960 Lm
POWER CONSUMPTION:	36 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	110 Lm/Watt
COLOR TEMPERATURE:	CCT





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

LED CEILING LIGHT



3801RD-36W
White



LAMP PLATE: Φ 350mm/3nails
LAMP SHADE: Φ 450mm/3nails
LUMINOUS FLUX: Φ 410mm / Φ 510mm
POWER CONSUMPTION: 3960-5280 Lm
COLOR RENDERING: 36 Watt / 48 Watt
LUMEN PER WATT: Ra>90
COLOR TEMPERATURE: 110 Lm/Watt
3in1



3802RD-36W
Coffee



LAMP PLATE: Φ 350mm/3nails
LAMP SHADE: Φ 410mm
LUMINOUS FLUX: 3960 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: Ra>90
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: 3in1



3803RD-36W
Gray



LAMP PLATE: Φ 350mm/3nails
LAMP SHADE: Φ 410mm
LUMINOUS FLUX: 3960 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: Ra>90
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: 3in1



3805RD-36W
Coffee



LAMP PLATE: Φ 350mm/3nails
LAMP SHADE: Φ 410mm
LUMINOUS FLUX: 3960 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: Ra>90
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: 3in1



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED CEILING LIGHT

www.jinwang.com.sg



3806RD-36W
Clear



LAMP PLATE: $\Phi 350\text{mm}/3\text{nails}$
LAMP SHADE: $\Phi 410\text{mm}$
LUMINOUS FLUX: 3960 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: 3in1



3809RD-36W
Clear



LAMP PLATE: $\Phi 350\text{mm}/3\text{nails}$
LAMP SHADE: $\Phi 410\text{mm}$
LUMINOUS FLUX: 3960 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: 3in1



3810RD-36W
Clear



LAMP PLATE: $\Phi 350\text{mm}/3\text{nails}$
LAMP SHADE: $\Phi 410\text{mm}$
LUMINOUS FLUX: 3960 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: 3in1



3811RD-36W
Clear



LAMP PLATE: $\Phi 350\text{mm}/3\text{nails}$
LAMP SHADE: $\Phi 410\text{mm}$
LUMINOUS FLUX: 3960 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: 3in1

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg




JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED CEILING LIGHT

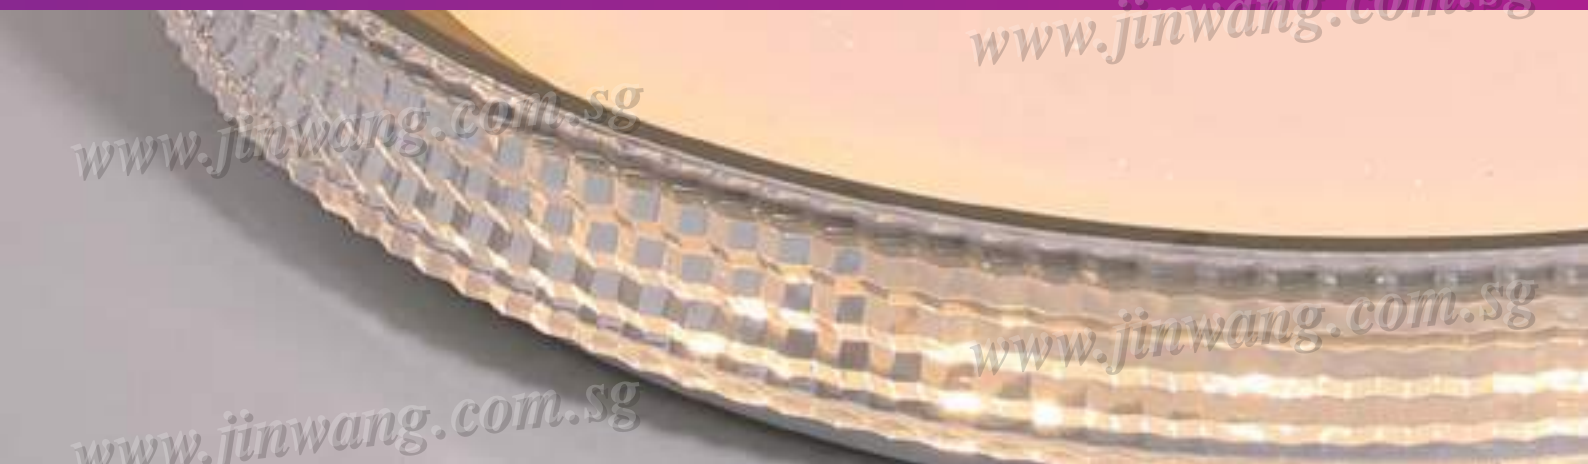

3830RD-36W
White / Gold



LAMP PLATE: $\Phi 350\text{mm}/4\text{nails}$
LAMP SHADE: $\Phi 400\text{mm}$
LUMINOUS FLUX: 3960 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: 3in1

3831RD-36W
White / Black



LAMP PLATE: $\Phi 350\text{mm}/3\text{nails}$
LAMP SHADE: $\Phi 410\text{mm}$
LUMINOUS FLUX: 3960 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: CCT



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED CEILING LIGHT



3813RD-36W
White



LAMP PLATE: $\Phi 350\text{mm}/3\text{nails}$
LAMP SHADE: $\Phi 410\text{mm}$
LUMINOUS FLUX: 3960 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: 3in1



3828RD-36W
WH+GD




LAMP PLATE: $\Phi 350\text{mm}/3\text{nails}$
LAMP SHADE: $\Phi 410\text{mm}$
LUMINOUS FLUX: 3960 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: 3in1



3833RD-36W
Clear



LAMP PLATE: $\Phi 350\text{mm}/3\text{nails}$
LAMP SHADE: $\Phi 410\text{mm}$
LUMINOUS FLUX: 3960 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: CCT

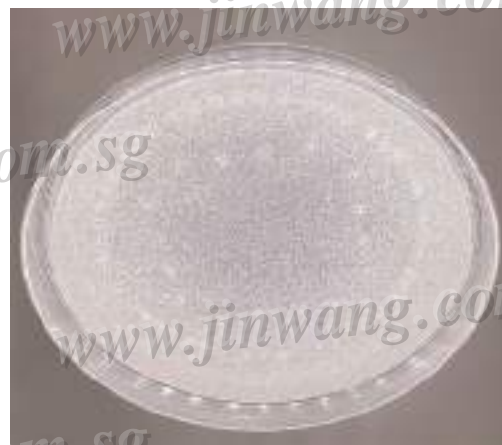

3838RD-36W
Clear



LAMP PLATE: $\Phi 350\text{mm}/3\text{nails}$
LAMP SHADE: $\Phi 410\text{mm}$
LUMINOUS FLUX: 3960 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: 3in1



JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED CEILING LIGHT



3827RD-36W
WH+GD / CF+GD

LAMP PLATE:	Φ350mm/4nails
LAMP SHADE:	Φ410mm
LUMINOUS FLUX:	3960 Lm
POWER CONSUMPTION:	36 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	110 Lm/Watt
COLOR TEMPERATURE:	3in1



3837RD-36W
CR+SR / CR+GD

LAMP PLATE:	Φ350mm/3nails
LAMP SHADE:	Φ410mm
LUMINOUS FLUX:	3960 Lm
POWER CONSUMPTION:	36 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	110 Lm/Watt
COLOR TEMPERATURE:	CCT





JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED CEILING LIGHT



3822RD-36W

WH+LW / WH+DW



LAMP PLATE:
LAMP SHADE:
LUMINOUS FLUX:
POWER CONSUMPTION:
COLOR RENDERING:
LUMEN PER WATT:
COLOR TEMPERATURE:

Φ350mm/3nails
Φ410mm
3960 Lm
36 Watt
Ra>90
110 Lm/Watt
3in1

3822RD-48W

WH+LW / WH+DW



LAMP PLATE:
LAMP SHADE:
LUMINOUS FLUX:
POWER CONSUMPTION:
COLOR RENDERING:
LUMEN PER WATT:
COLOR TEMPERATURE:

Φ450mm/3nails
Φ510mm
5280 Lm
48 Watt
Ra>90
110 Lm/Watt
3in1





JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED CEILING LIGHT

www.jinwang.com.sg



3801RD-48W
White



LAMP PLATE: $\Phi 450\text{mm}/3\text{nails}$
LAMP SHADE: $\Phi 510\text{mm}$
LUMINOUS FLUX: 5280 Lm
POWER CONSUMPTION: 48 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: 3in1



3801SQ-48W
White



LAMP PLATE: $L450 \times W450\text{mm}$
LAMP SHADE: $L500 \times W500\text{mm}$
LUMINOUS FLUX: 5280 Lm
POWER CONSUMPTION: 48 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: 3in1



3803SQ-48W
Gray



LAMP PLATE: $L450 \times W450\text{mm}$
LAMP SHADE: $L500 \times W500\text{mm}$
LUMINOUS FLUX: 5280 Lm
POWER CONSUMPTION: 48 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: 3in1



3803RD-48W
Gray



LAMP PLATE: $\Phi 450\text{mm}/3\text{nails}$
LAMP SHADE: $\Phi 510\text{mm}$
LUMINOUS FLUX: 5280 Lm
POWER CONSUMPTION: 48 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: 3in1



JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

LED CEILING LIGHT

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg



3802SQ-48W
Coffee



LAMP PLATE:	L450xW450mm
LAMP SHADE:	L500xW500mm
LUMINOUS FLUX:	5280 Lm
POWER CONSUMPTION:	48 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	110 Lm/Watt
COLOR TEMPERATURE:	3in1



3806RD-48W
Clear



LAMP PLATE:	Φ450mm/3nails
LAMP SHADE:	Φ510mm
LUMINOUS FLUX:	5280 Lm
POWER CONSUMPTION:	48 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	110 Lm/Watt
COLOR TEMPERATURE:	3in1

3829RD-80W
White / Black



DIMENSION:	Φ500mm
LUMINOUS FLUX:	8800 Lm
POWER CONSUMPTION:	80 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	110 Lm/Watt
COLOR TEMPERATURE:	RGB



JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

**LED
CEILING LIGHT**



3861RD-48W

White



DIMENSION:

Φ400xH90mm

LUMINOUS FLUX:

5280 Lm

POWER CONSUMPTION:

48 Watt

COLOR RENDERING:

Ra>90

LUMEN PER WATT:

110 Lm/Watt

COLOR TEMPERATURE:

CCT



3862RD-48W

White



DIMENSION:

Φ390xH110mm

LUMINOUS FLUX:

5280 Lm

POWER CONSUMPTION:

48 Watt

COLOR RENDERING:

Ra>90

LUMEN PER WATT:

110 Lm/Watt

COLOR TEMPERATURE:

CCT





JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED CEILING LIGHT



2801RD-48W
White / Brushed Gray



DIMENSION: $\Phi 392 \times H50 \text{mm}$
LUMINOUS FLUX: 5280 Lm
POWER CONSUMPTION: 48 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: CCT
MATERIAL: Aluminum+PP



2802RD-48W
White / Brushed Gray



DIMENSION: $\Phi 403 \times H55 \text{mm}$
LUMINOUS FLUX: 5280 Lm
POWER CONSUMPTION: 48 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: CCT
MATERIAL: Aluminum+PP



2801SQ-48W
White / Brushed Gray



DIMENSION: $L552 \times W252 \times H50 \text{mm}$
LUMINOUS FLUX: 5280 Lm
POWER CONSUMPTION: 48 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: CCT
MATERIAL: Aluminum+PP



2802SQ-48W
White / Brushed Gray



DIMENSION: $L563 \times W263 \times H55 \text{mm}$
LUMINOUS FLUX: 5280 Lm
POWER CONSUMPTION: 48 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: CCT
MATERIAL: Aluminum+PP





JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED CEILING LIGHT

SKY MIRROR LAMP

Integrating lighting technology with innovative design concepts to create a comfortable, healthy, and personalized light environment, fostering a warm and cozy living atmosphere.

1. Simulates the spectral distribution of natural sunlight to truly restore the natural colors of objects.
2. Multi-scene mode switching: Equipped with an intelligent chip, preloaded with multiple scene modes.
3. Intelligent dimming and color adjustment: Colors can be freely adjusted via an RGB color palette to achieve the most suitable light brightness and hue.

Sunset Glow Mode



Summer Mode



Clear Sky Mode



Dawn Mode



3863RD-390 / 3863-RD-520
White



LAMP PLATE:

Φ390xH80mm

Φ520xH80mm

LUMINOUS FLUX:

3600 Lm

POWER CONSUMPTION:

60 Watt

COLOR RENDERING:

Ra>97

LUMEN PER WATT:

110 Lm/Watt

COLOR TEMPERATURE:

RGB(1800K-12000K)

SMART MODULE:

Tiny Smart



Sky Mirror Lamp APP Operation Guide

Sky Mirror Lamp APP Download





JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED CEILING LIGHT



3860-50W
White / Black



DIMENSION: L600xW200xH50mm
LUMINOUS FLUX: 5500 Lm
POWER CONSUMPTION: 50 Watt
COLOR RENDERING: Ra>90
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: CCT



Pure White Light 6000K	Neutral White Light 4000K	Warm Yellow Light 3000K
-	-	-

Bright illumination	Warm & Comfortable	Warm Light
---------------------	--------------------	------------



3870-45W
White / Black



DIMENSION: L600xW130xH50mm
LUMINOUS FLUX: 4950 Lm
POWER CONSUMPTION: 45 Watt
COLOR RENDERING: Ra>90
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: CCT



3890-55W
White / Black



DIMENSION: L900xW130xH50mm
LUMINOUS FLUX: 6050 Lm
POWER CONSUMPTION: 55 Watt
COLOR RENDERING: Ra>90
LUMEN PER WATT: 110 Lm/Watt
COLOR TEMPERATURE: CCT



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED CEILING LIGHT



218RD-24W
White / Black

DIMENSION: $\Phi 17.5\text{cm}$
LUMINOUS FLUX: 2640 Lm
POWER CONSUMPTION: 24 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEM: 3000K/4000K/6500K
MATERIAL: Aluminum+PP



222RD-36W
White / Black

DIMENSION: $\Phi 22.5\text{cm}$
LUMINOUS FLUX: 3960 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEM: 3000K/4000K/6500K
MATERIAL: Aluminum+PP

230RD-48W
White / Black

DIMENSION: $\Phi 30\text{cm}$
LUMINOUS FLUX: 5280 Lm
POWER CONSUMPTION: 48 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEM: 3000K/4000K/6500K
MATERIAL: Aluminum+PP



318SQ-24W
White / Black

DIMENSION: $L17.5 \times W17.5\text{cm}$
LUMINOUS FLUX: 2640 Lm
POWER CONSUMPTION: 24 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEM: 3000K/4000K/6500K
MATERIAL: Aluminum+PP



322SQ-36W
White / Black

DIMENSION: $L22.5 \times W22.5\text{cm}$
LUMINOUS FLUX: 3960 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEM: 3000K/4000K/6500K
MATERIAL: Aluminum+PP

330SQ-48W
White / Black

DIMENSION: $L30 \times W30\text{cm}$
LUMINOUS FLUX: 5280 Lm
POWER CONSUMPTION: 48 Watt
COLOR RENDERING: $Ra > 90$
LUMEN PER WATT: 110 Lm/Watt
COLOR TEM: 3000K/4000K/6500K
MATERIAL: Aluminum+PP





JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED CEILING LIGHT



020RD-20W White / Black



DIMENSION:	Φ17.3cm
LUMINOUS FLUX:	2200 Lm
POWER CONSUMPTION:	20 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	110 Lm/Watt
COLOR TEMPERATURE:	3000K/4100K/6500K
MATERIAL:	ABS+PP



020SQ-20W White / Black



DIMENSION:	L17.3xW17.3cm
LUMINOUS FLUX:	2200 Lm
POWER CONSUMPTION:	20 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	110 Lm/Watt
COLOR TEMPERATURE:	3000K/4100K/6500K
MATERIAL:	ABS+PP

030RD-30W White / Black



DIMENSION:	Φ22.2cm
LUMINOUS FLUX:	3300 Lm
POWER CONSUMPTION:	30 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	110 Lm/Watt
COLOR TEMPERATURE:	3000K/4100K/6500K
MATERIAL:	ABS+PP

030SQ-30W White / Black



DIMENSION:	L22.2xW22.2cm
LUMINOUS FLUX:	3300 Lm
POWER CONSUMPTION:	30 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	110 Lm/Watt
COLOR TEMPERATURE:	3000K/4100K/6500K
MATERIAL:	ABS+PP

040RD-40W White / Black



DIMENSION:	Φ29.8cm
LUMINOUS FLUX:	4400 Lm
POWER CONSUMPTION:	40 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	110 Lm/Watt
COLOR TEMPERATURE:	3000K/4100K/6500K
MATERIAL:	ABS+PP

040SQ-40W White / Black



DIMENSION:	L29.8xW29.8cm
LUMINOUS FLUX:	4400 Lm
POWER CONSUMPTION:	40 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	110 Lm/Watt
COLOR TEMPERATURE:	3000K/4100K/6500K
MATERIAL:	ABS+PP



JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED CEILING LIGHT



050REC-50W

White / Black



DIMENSION:	44.6x22cm
LUMINOUS FLUX:	5500 Lm
POWER CONSUMPTION:	50 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	110 Lm/Watt
LED CHIP:	LED MODULE
COLOR TEMPERATURE:	3000K/4100K/6500K
MATERIAL:	ABS+PP



2803-120

White



DIMENSION:	Φ120mm
FITTING:	G9
COLOR TEMPERATURE:	3000K/4000K/6000K/CCT
MATERIAL:	Metal+glass



2806-150

White



DIMENSION:	Φ150mm
FITTING:	G9
COLOR TEMPERATURE:	3000K/4000K/6000K/CCT
MATERIAL:	Metal+glass



JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+ 65 6980 5207 | + 65 9878 2388

RETRACTABLE PENDANT LIGHT

Double light source with upper
and lower illumination design

○○○



Upper layer: diffused light
Lower layer: concentrated light
High color rendering index (CRI), uniform and soft light,
comfortable and non-glaring

○○○



JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED
PENDANT LIGHT

www.jinwang.com.sg

www.jinwang.com.sg



MD-3661-3L



FITTING:

E27

COLOR:

Dark Wood Grain

MATERIAL:

Metal



MD-3662-3L



FITTING:

E27

COLOR:

Dark Wood Grain

MATERIAL:

Metal





JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED PENDANT LIGHT



MD-3677-3L



FITTING: E27
COLOR: White
MATERIAL: Wood+PC 3D printing



MD-3678-3L



FITTING: E27
COLOR: White
MATERIAL: Wood+PC 3D printing



MD-3679-3L



FITTING: E27
COLOR: White
MATERIAL: Wood+PC 3D printing



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED PENDANT LIGHT



MD-3680-3L



FITTING: E27
COLOR: White
MATERIAL: Wood+Glass



MD-3681-3L



FITTING: E27
COLOR: White
MATERIAL: Wood+Glass



MD-3685-3L



FITTING: E27
COLOR: Clear
MATERIAL: Glass



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED
PENDANT LIGHT



MD-3686-3L



FITTING:
COLOR:
MATERIAL:

E27
White
Wood+PC



MD-3703



DIMENSION: 300mm / 400mm / 500mm
FITTING: E27
COLOR: White / Gray
MATERIAL: Resin



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED
PENDANT LIGHT



MD-3663-5L



MD-3667-3L

MD-3663-5L



LUMINOUS FLUX:	2400-3600 Lm
POWER CONSUMPTION:	20-30Watt
COLOR RENDERING:	Ra>95
LUMEN PER WATT:	120 Lm/Watt
COLOR TEMPERATURE:	RGB
MATERIAL:	Aluminum

MD-3667-3L



LUMINOUS FLUX:	2400-3600 Lm
POWER CONSUMPTION:	20-30Watt
COLOR RENDERING:	Ra>95
LUMEN PER WATT:	120 Lm/Watt
COLOR TEMPERATURE:	RGB
MATERIAL:	Aluminum+Acrylic

MD-3670-5L



LUMINOUS FLUX:	2400-3600 Lm
POWER CONSUMPTION:	20-30Watt
COLOR RENDERING:	Ra>95
LUMEN PER WATT:	120 Lm/Watt
COLOR TEMPERATURE:	RGB
MATERIAL:	PC+Metal



MD-3670-5L



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED
PENDANT LIGHT



MD-3673-3L



LUMINOUS FLUX: 2400-3600 Lm
POWER CONSUMPTION: 20-30Watt
COLOR RENDERING: Ra>95
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: RGB
MATERIAL: Aluminum+Acrylic

MD-3676-3L



LUMINOUS FLUX: 2400-3600 Lm
POWER CONSUMPTION: 20-30Watt
COLOR RENDERING: Ra>95
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: RGB
MATERIAL: Aluminum+Acrylic



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED

PENDANT LIGHT



MD-3683-5L



MD-3692-5L

MD-3683-5L



LUMINOUS FLUX:	2400-3600 Lm
POWER CONSUMPTION:	20-30Watt
COLOR RENDERING:	Ra>95
LUMEN PER WATT:	120 Lm/Watt
COLOR TEMPERATURE:	RGB
MATERIAL:	Aluminum+Acrylic

MD-3692-5L



LUMINOUS FLUX:	2400-3600 Lm
POWER CONSUMPTION:	20-30Watt
COLOR RENDERING:	Ra>95
LUMEN PER WATT:	120 Lm/Watt
COLOR TEMPERATURE:	RGB
MATERIAL:	Aluminum+Acrylic

MD-3693-5L



LUMINOUS FLUX:	2400-3600 Lm
POWER CONSUMPTION:	20-30Watt
COLOR RENDERING:	Ra>95
LUMEN PER WATT:	120 Lm/Watt
COLOR TEMPERATURE:	RGB
MATERIAL:	Aluminum+Acrylic



MD-3693-5L



JW LIGHTS m BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

LED
PENDANT LIGHT

www.jinwang.com.sg

MD-3687-900



DIMENSION: 900mm
LUMINOUS FLUX: 4320 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: Ra>95
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: RGB
MATERIAL: Aluminum+Acrylic



www.jinwang.com.sg



MD-3688-900



DIMENSION: 900mm
LUMINOUS FLUX: 4320 Lm
POWER CONSUMPTION: 36 Watt
COLOR RENDERING: Ra>95
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: RGB
MATERIAL: Aluminum+Acrylic

www.jinwang.com.sg

www.jinwang.com.sg

MD-3689-1200



DIMENSION: 1200mm
LUMINOUS FLUX: 5760 Lm
POWER CONSUMPTION: 48 Watt
COLOR RENDERING: Ra>95
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: RGB
MATERIAL: Aluminum+Acrylic



www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg



JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

**LED
PENDANT LIGHT**



MD-3697-5R-1.2M
T1 / Rose Gold



DIMENSION:	1200mm
LUMINOUS FLUX:	5760 Lm
POWER CONSUMPTION:	48 Watt
COLOR RENDERING:	Ra>95
LUMEN PER WATT:	120 Lm/Watt
COLOR TEMPERATURE:	CCT
MATERIAL:	Stainless steel
SMART MODULE:	2.4G



MD-3707-3L
Black / Rose Gold



LUMINOUS FLUX:	2880 Lm
POWER CONSUMPTION:	24 Watt
COLOR RENDERING:	Ra>95
LUMEN PER WATT:	120 Lm/Watt
COLOR TEMPERATURE:	4000K
MATERIAL:	PC+Metal



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

LED
PENDANT LIGHT



Front



Lamplight



Steel Wire



MD-3705
Black / White



DIMENSION:	1080mm
LUMINOUS FLUX:	4320 Lm
POWER CONSUMPTION:	36 Watt
COLOR RENDERING:	Ra>95
LUMEN PER WATT:	120 Lm/Watt
BEAM ANGLE:	36°
COLOR TEMPERATURE:	CCT
MATERIAL:	Aluminum+Acrylic



JW LIGHTS m BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

LED
PENDANT LIGHT



Front



Back



Steel Wire

MD-3706
Black / White



DIMENSION:	800mm
LUMINOUS FLUX:	3600 Lm
POWER CONSUMPTION:	30 Watt
COLOR RENDERING:	Ra>95
LUMEN PER WATT:	120 Lm/Watt
BEAM ANGLE:	36°
COLOR TEMPERATURE:	CCT
MATERIAL:	Aluminum+Acrylic





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

LED
PENDANT LIGHT

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

MD-3712-GD-1.2M-CCT



DIMENSION:	1200mm
LUMINOUS FLUX:	3960 Lm
POWER CONSUMPTION:	36 Watt
COLOR RENDERING:	Ra>95
LUMEN PER WATT:	120 Lm/Watt
COLOR TEMPERATURE:	CCT
MATERIAL:	Aluminum+Acrylic





JW LIGHTS m BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

LED
PENDANT LIGHT



3691-0.9M-BK-CCT



DIMENSION: 1200mm
LUMINOUS FLUX: 4800 Lm
POWER CONSUMPTION: 40 Watt
COLOR RENDERING: Ra>95
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: CCT
MATERIAL: Aluminum+Acrylic



SJ-3690-1.2M-BK-CCT




DIMENSION: 1200mm
LUMINOUS FLUX: 6050 Lm
POWER CONSUMPTION: 55 Watt
COLOR RENDERING: Ra>95
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: CCT
MATERIAL: Aluminum+Acrylic



JW LIGHTS m BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

LED
PENDANT LIGHT

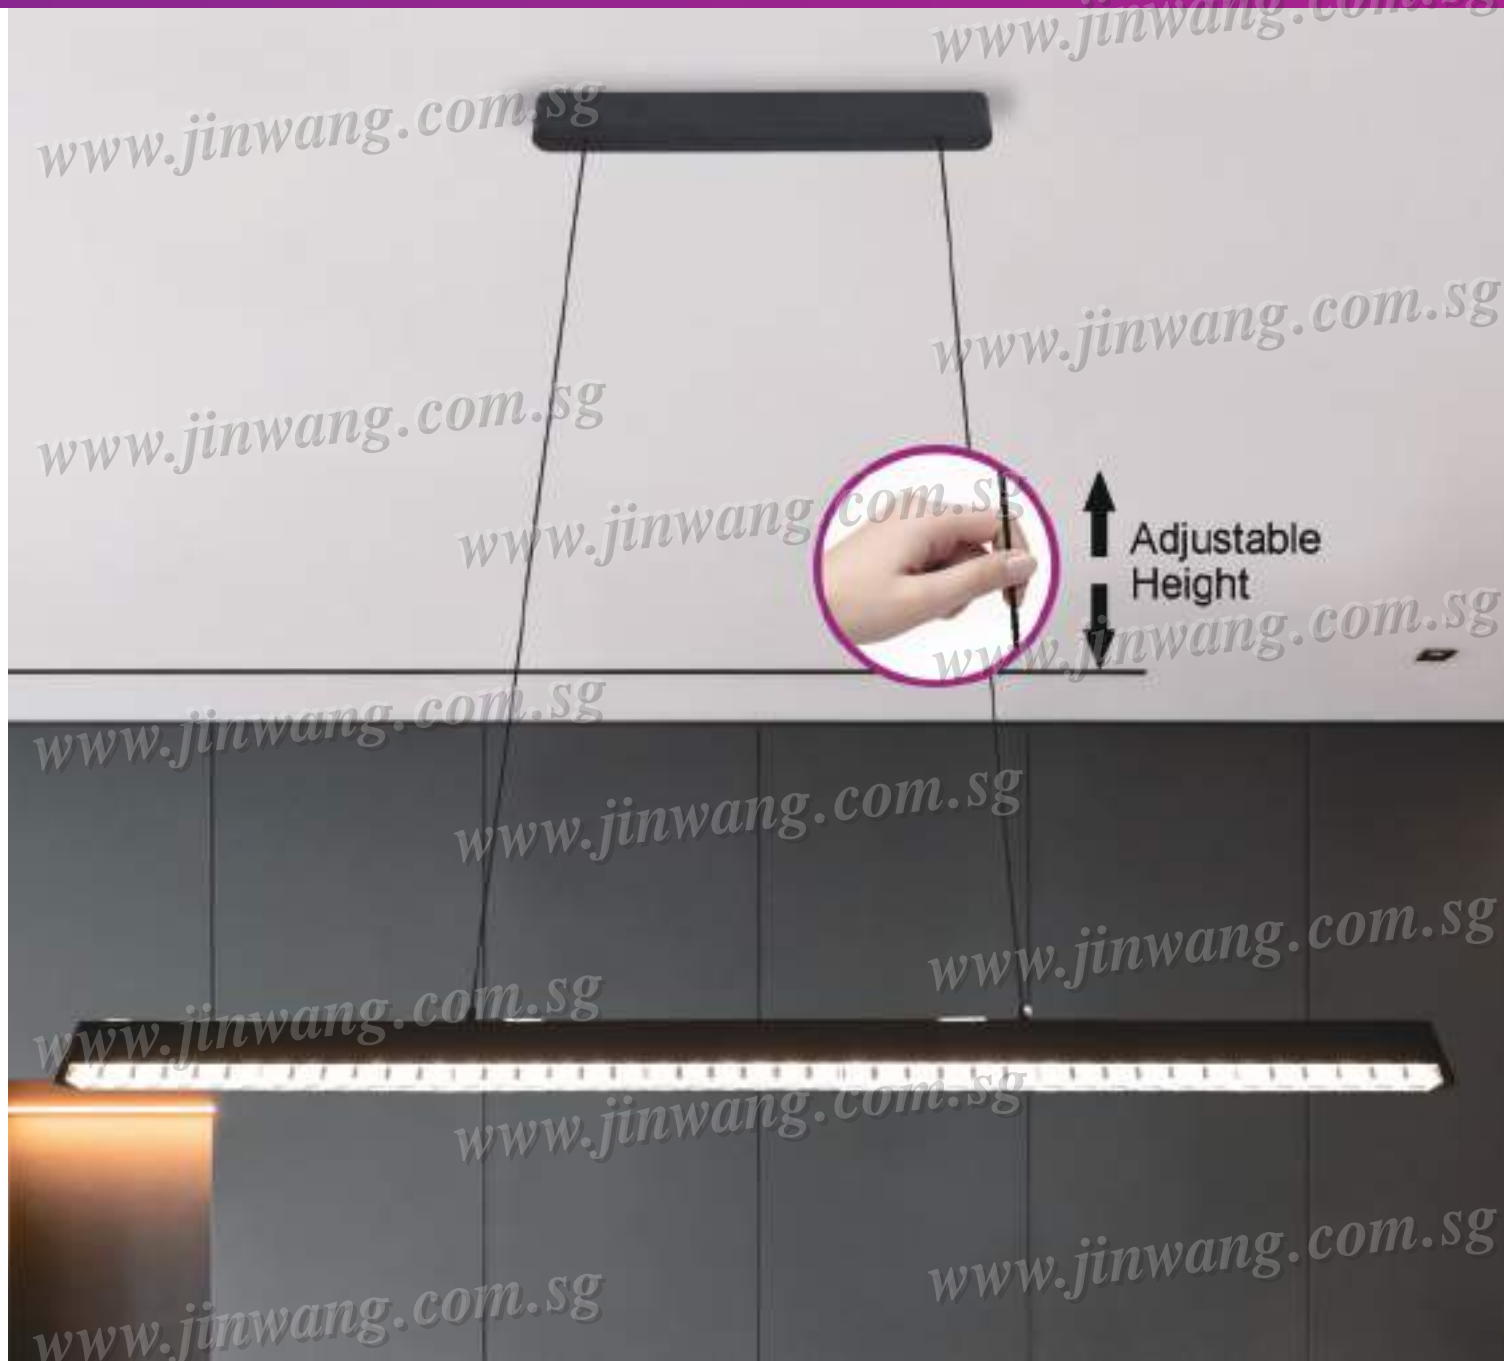

Front



SJ-3713-BK-1.13M-CCT



DIMENSION:	1130mm
LUMINOUS FLUX:	5280 Lm
POWER CONSUMPTION:	40 Watt
COLOR RENDERING:	Ra>95
LUMEN PER WATT:	120 Lm/Watt
COLOR TEMPERATURE:	CCT
MATERIAL:	Aluminum+Acrylic



JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

LED
PENDANT LIGHT

Gently Pull To Adjust Length (Extends/Retracts)



MD-3698



DIMENSION: $\Phi 380\text{mm}$
LUMINOUS FLUX: 1080 Lm
POWER CONSUMPTION: 9 Watt
COLOR RENDERING: Ra>95
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: 4000K
MATERIAL: Aluminum+Iron

MD-3699



DIMENSION: $\Phi 300\text{mm}$
LUMINOUS FLUX: 1080 Lm
POWER CONSUMPTION: 9 Watt
COLOR RENDERING: Ra>95
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: 4000K
MATERIAL: Aluminum+Iron

MD-3700



DIMENSION: $\Phi 300\text{mm}$
LUMINOUS FLUX: 1080 Lm
POWER CONSUMPTION: 9 Watt
COLOR RENDERING: Ra>95
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: 4000K
MATERIAL: Aluminum+Iron



JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

LED
PENDANT LIGHT

Gently Pull To Adjust Length (Extends/Retracts)



MD-3701



DIMENSION: $\Phi 200\text{mm}$
LUMINOUS FLUX: 1080 Lm
POWER CONSUMPTION: 9 Watt
COLOR RENDERING: $Ra > 95$
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: 4000K
MATERIAL: Aluminum+Acrylic

MD-3702



DIMENSION: $\Phi 140\text{mm}$
LUMINOUS FLUX: 720 Lm
POWER CONSUMPTION: 6 Watt
COLOR RENDERING: $Ra > 95$
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: 4000K
MATERIAL: Aluminum+Acrylic

MD-3708-1L



LUMINOUS FLUX: 1200 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: $Ra > 95$
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: 4100K
MATERIAL: PC+Metal




JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

LED
PENDANT LIGHT


Partial Pearl Black, Manual Lifting, Three-color Dimming




Touchless Sensor
Dimming



Maximum sensing
distance: 5cm



Hover for Stepless
Dimming



Effortless On/Off &
Color Temp Adjustment



MD-3709-1L



DIMENSION: $\Phi 150\text{mm}$
LUMINOUS FLUX: 720 Lm
POWER CONSUMPTION: 6 Watt
COLOR RENDERING: $Ra > 95$
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: CCT
MATERIAL: Aluminum+Glass

MD-3710-1L



DIMENSION: $\Phi 150\text{mm}$
LUMINOUS FLUX: 720 Lm
POWER CONSUMPTION: 6 Watt
COLOR RENDERING: $Ra > 95$
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: CCT
MATERIAL: Aluminum+Glass

MD-3711-1L



DIMENSION: $\Phi 165\text{mm}$
LUMINOUS FLUX: 720 Lm
POWER CONSUMPTION: 6 Watt
COLOR RENDERING: $Ra > 95$
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: CCT
MATERIAL: Aluminum+Glass



JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388


**LED
PENDANT LIGHT**

www.jinwang.com.sg


www.jinwang.com.sg




Touchless Sensor Dimming



Maximum sensing distance: 5cm



Hover for Stepless Dimming



Effortless On/Off & Color Temp Adjustment



SJ-3715--BK-1.2M-CCT



DIMENSION: 1200mm
LUMINOUS FLUX: 5280 Lm
POWER CONSUMPTION: 40 Watt
COLOR RENDERING: Ra>95
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: CCT
MATERIAL: Aluminum+Acrylic

SJ-3716-DW-1.2M-CCT



DIMENSION: 1200mm
LUMINOUS FLUX: 3300 Lm
POWER CONSUMPTION: 30 Watt
COLOR RENDERING: Ra>95
LUMEN PER WATT: 120 Lm/Watt
COLOR TEMPERATURE: CCT
MATERIAL: Aluminum+Acrylic



JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg



LEDmodule 54W

POWER: 54 Watt
COLOR TEMP: 6000K/3in1



LEDmodule 36W-3IN1

POWER: 36 Watt
COLOR TEMPERATURE: 3in1



LEDmodule 24W-RD

POWER: 24 Watt
COLOR TEMP: 4000K/6000K/3in1

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg



GU10-5W-CCT-4

POWER: 5 Watt
COLOR TEMPERATURE: CCT
FUNCTION: 4-Speed



G9-6W-CCT

POWER: 6 Watt
COLOR TEMPERATURE: CCT
LED: 90D



G9-6W-3000K/4000K/6000K

POWER: 6 Watt
COLOR TEMP: 3000K/4000K/6000K
LED: 88D

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg



2.4G Smart Mesh Gateway

POWER: >1 Watt
INPUT: 5V
SMART MODULE: 2.4G



TY-WG86-3in1

POWER: >1 Watt
INPUT: 5V
SMART MODULE: Wifi/Zigbee /BT MESH

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg



JW LIGHTS M BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

www.jinwang.com.sg



www.jinwang.com.sg

LAMP CUP

COLOR: GOLD / ROSE GOLD
FITTING: DOWNLIGHT
STYLE: 807/613/712



Remote Control

FITTING: CEILING LIGHT
STYLE: 2801/2802

www.jinwang.com.sg



www.jinwang.com.sg

Remote Control

FITTING: PENDANT LIGHT
STYLE: MD-3690/3691/3712
SJ-3690/3713

www.jinwang.com.sg



www.jinwang.com.sg

Remote Control

FITTING: CEILING LIGHT
2.4G-Drive
STYLE: 2801/2802

www.jinwang.com.sg



Remote Control

FITTING: CEILING LIGHT
STYLE: 3861/3862

www.jinwang.com.sg



www.jinwang.com.sg

Remote Control

FITTING: CEILING LIGHT
STYLE: 3863

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg



JW LIGHTS n BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388