



JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

ULTRA-THIN MAGNETIC TRACK LIGHTS

1 | ULTRA-THIN MAGNETIC TRACK LIGHTS

THIN & CUSTOMIZABLE


Experience a sleek, hidden design with a 6mm ultra-thin track.
The light positions can be adjusted freely without ceiling reconstruction.

The track can be installed at any desired length,
and splicing allows extension and rotation up to 30 meters.

Intelligent Radio Frequency Remote Control

- Group Control (supports programming for 4 light groups)
- One-click Switch between Warm Light / Daylight / Cool White Light
- Brightness Adjustment (1-100% stepless dimming for brightness)
- Color Temperature Adjustment 3000-6000K stepless tuning
- Quick Code Pairing/Code Clearing

2.4G Remote Control

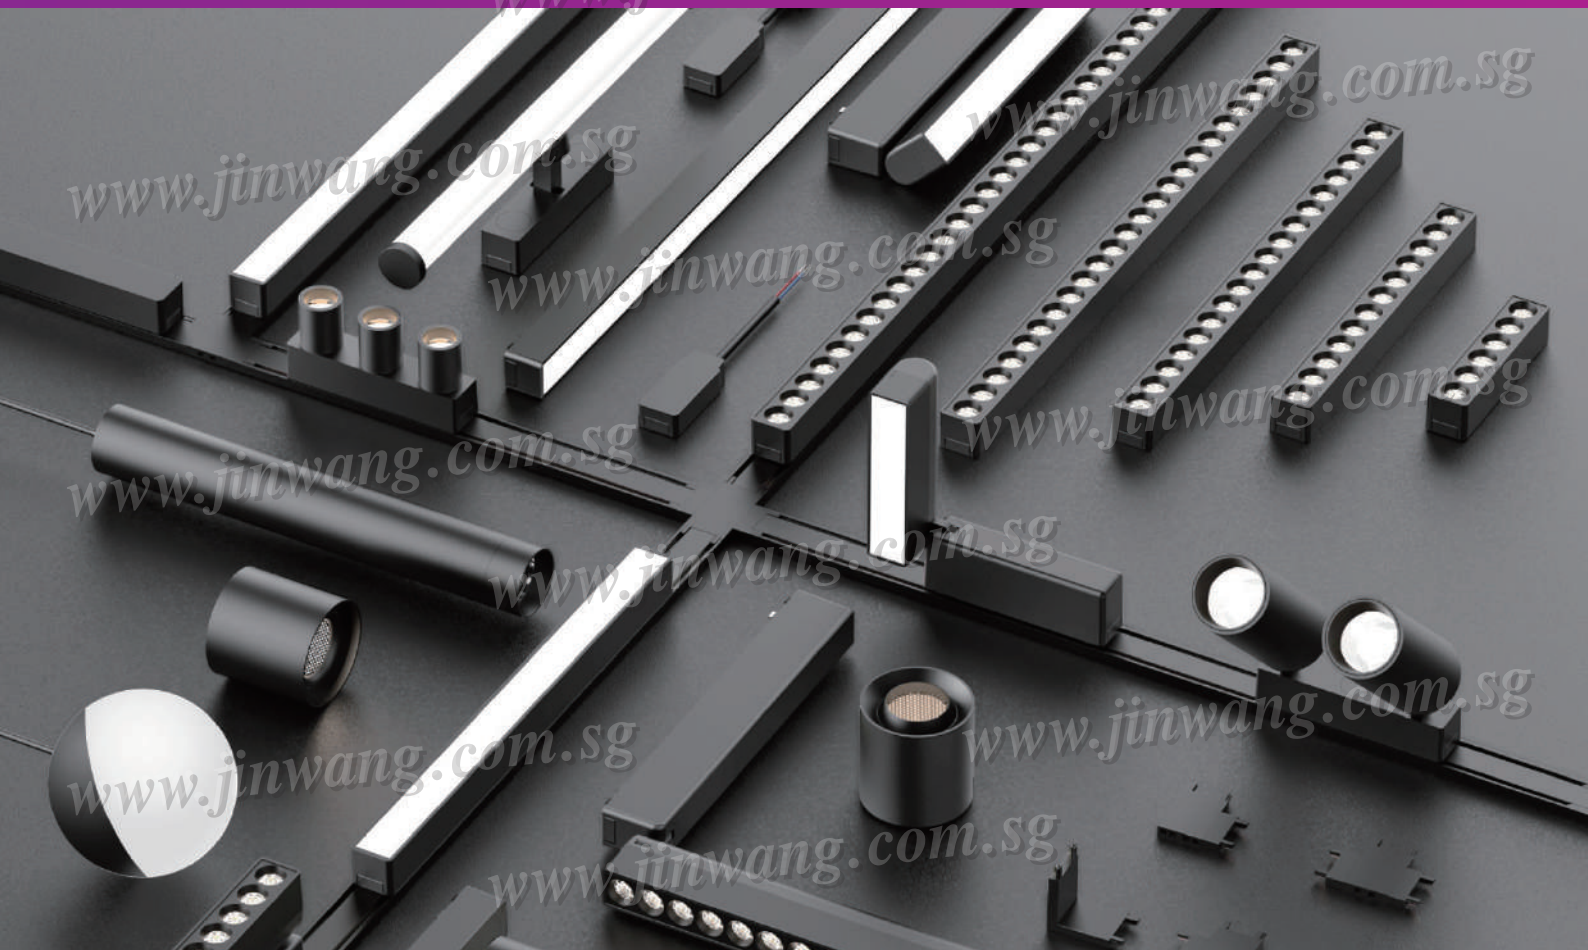



JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

ULTRA-THIN MAGNETIC TRACK LIGHTS

LT26-6T-3000K/4000K-Black

LT26-6T-2.4G-Black/White

DIMENSION:	L122xW26xH24mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	382.3 Lm
POWER CONSUMPTION:	6 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	61.7 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G



LT26-12T-3000K/4000K-Black

LT26-12T-2.4G-Black/White

DIMENSION:	L230xW26xH24mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	677.2 Lm
POWER CONSUMPTION:	12 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	61.4 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G



LT26-18T-3000K/4000K-Black

LT26-18T-2.4G-Black/White

DIMENSION:	L338xW26xH24mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	1265.4 Lm
POWER CONSUMPTION:	18 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	59.8 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G



TRACK

Grille Light



JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

**ULTRA-THIN MAGNETIC
TRACK LIGHTS**

TRACK Floodlight

LT26-300F-3000K/4000K-Black

LT26-300F-2.4G-Black/White

LT26-300F-3CCT-Black/White

DIMENSION: L315xW26xH24mm
MATERIAL: Aluminum + Plastic
LUMINOUS FLUX: 559.5 Lm
POWER CONSUMPTION: 10 Watt
COLOR RENDERING: Ra>90
LUMEN PER WATT: 51.8 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 150°
INPUT: DC 48V
COLOR TEMPERATURE: 3000K/4000K/CCT
SMART MODULE: 2.4G/DIP Switch 3CCT



LT26-600F-3000K/4000K-Black

LT26-600F-2.4G-Black/White

LT26-600F3CCT-Black/White

DIMENSION: L615xW26xH24mm
MATERIAL: Aluminum + Plastic
LUMINOUS FLUX: 1064.3 Lm
POWER CONSUMPTION: 20 Watt
COLOR RENDERING: Ra>90
LUMEN PER WATT: 52.1 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 150°
INPUT: DC 48V
COLOR TEMPERATURE: 3000K/4000K/CCT
SMART MODULE: 2.4G/DIP Switch 3CCT



LT26-900F-3000K/4000K-Black

LT26-900F-2.4G-Black/White

LT26-900F-3CCT-Black/White

DIMENSION: L915xW26xH24mm
MATERIAL: Aluminum + Plastic
LUMINOUS FLUX: 1507.7 Lm
POWER CONSUMPTION: 30 Watt
COLOR RENDERING: Ra>90
LUMEN PER WATT: 52.5 Lm/Watt
LED CHIP: Bridgelux
BEAM ANGLE: 150°
INPUT: DC 48V
COLOR TEMPERATURE: 3000K/4000K/CCT
SMART MODULE: 2.4G/DIP Switch 3CCT






JW LIGHTS m BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

**ULTRA-THIN MAGNETIC
TRACK LIGHTS**

FOLDABLE Track Grille Light

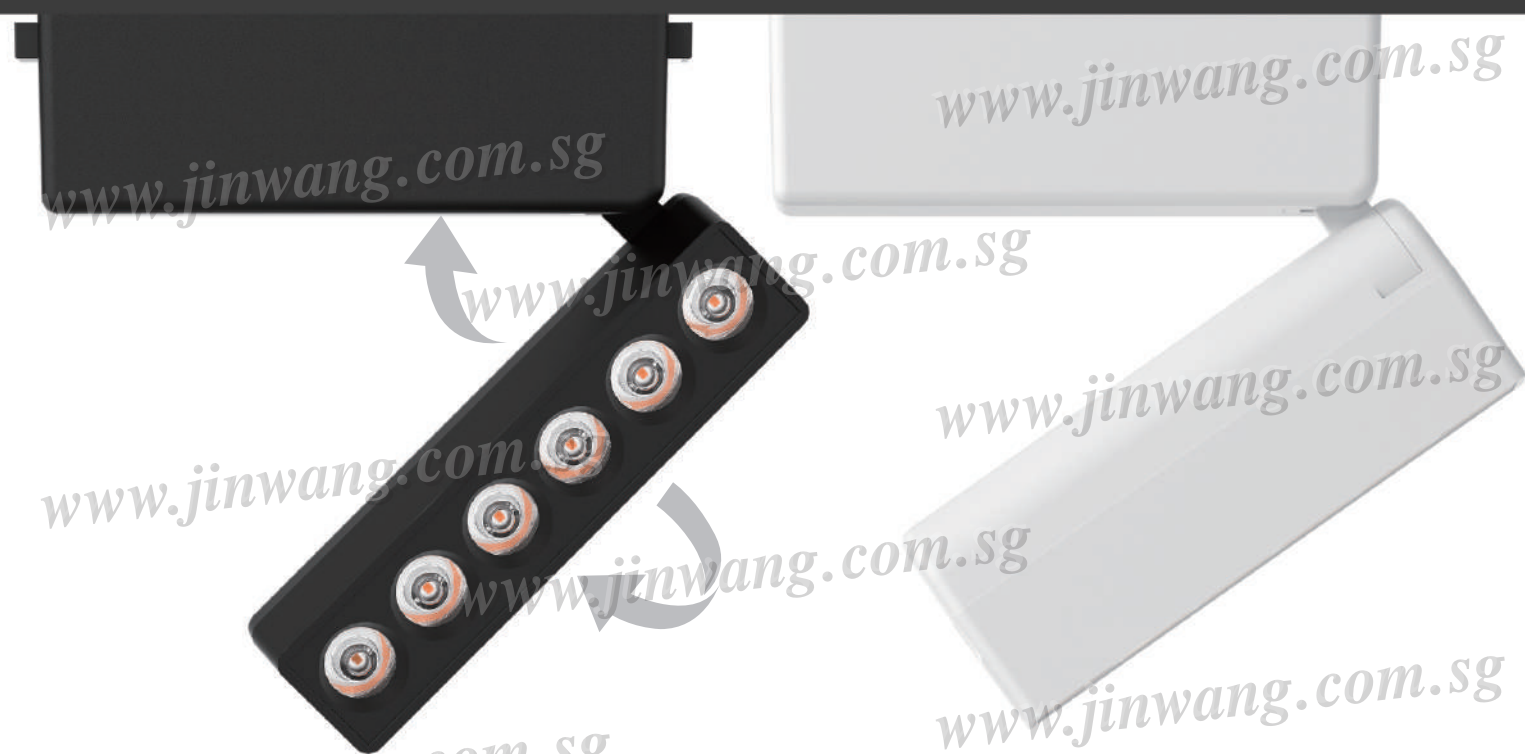

LT26-ZD-6T-3000K/4000K-Black
LT26-ZD-6T-2.4G-Black/White

DIMENSION:	L122xW26xH80mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	382.3 Lm
POWER CONSUMPTION:	6 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	61.7 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G

LT26-ZD-12T-3000K/4000K-Black
LT26-ZD-12T-2.4G-Black/White

DIMENSION:	L230xW26xH80mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	677.2 Lm
POWER CONSUMPTION:	12 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	61.4 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G






JW LIGHTS m BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

**ULTRA-THIN MAGNETIC
TRACK LIGHTS**

FOLDABLE Track Floodlight

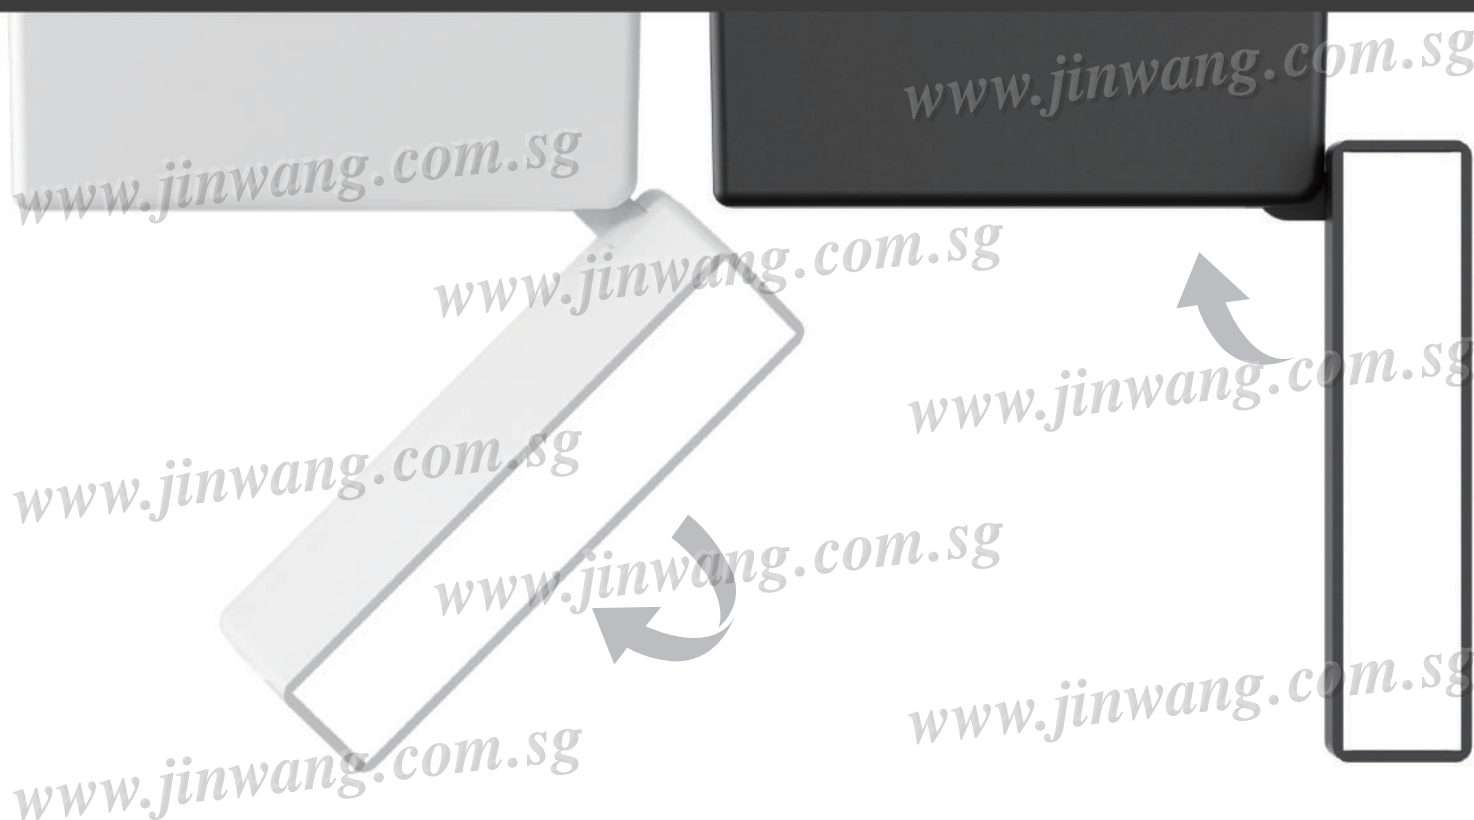

LT26-ZD-6F-3000K/4000K-Black
LT26-ZD-6F-2.4G-Black/White

DIMENSION:	L122xW26xH80mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	265.1Lm
POWER CONSUMPTION:	6 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	44.1 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	150°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G

LT26-ZD-12F-3000K/4000K-Black
LT26-ZD-12F-2.4G-Black/White

DIMENSION:	L230xW26xH80mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	519.3 Lm
POWER CONSUMPTION:	10 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	48.1 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	150°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G





JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

**ULTRA-THIN MAGNETIC
TRACK LIGHTS**

ADJUSTABLE Cylinder Spotlights

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg

www.jinwang.com.sg



LT26-YT80-3000K/4000K-Black
LT26-YT80-2.4G-Black/White

DIMENSION:	W80xH75mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	329.7 Lm
POWER CONSUMPTION:	6 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	52.1 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G







JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

**ULTRA-THIN MAGNETIC
TRACK LIGHTS**

Track Spotlight

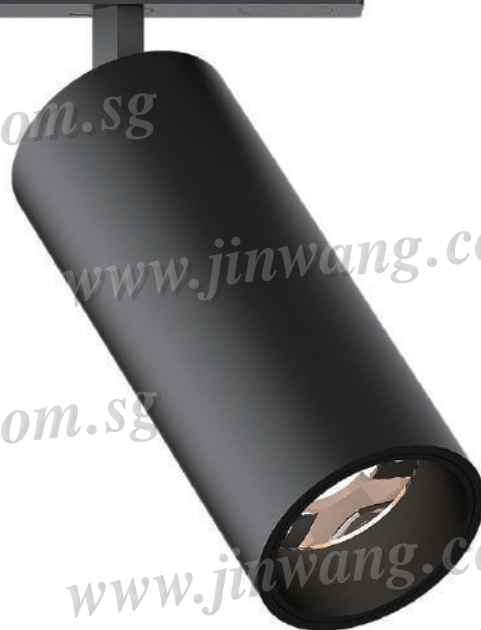

LT26-T44-3000K/4000K-Black
LT26-T44-2.4G-Black/White
LT26-T44-3CCT-Black/White

DIMENSION:	Φ44xH110mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	558.3 Lm
POWER CONSUMPTION:	9 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	62.6 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G/DIP Switch 3CCT

LT26-T55-3000K/4000K-Black
LT26-T55-2.4G-Black/White

DIMENSION:	Φ55xH138mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	1234 Lm
POWER CONSUMPTION:	18 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	65 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K/CCT
SMART MODULE:	2.4G





JW LIGHTS m BATHROOM

Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388

www.jinwang.com.sg

ULTRA-THIN MAGNETIC TRACK LIGHTS

Pendant Light

LT26-D300-2.4G

Black/White

DIMENSION:	Φ30xH300mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	366.3 Lm
POWER CONSUMPTION:	6 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	57.4 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	24°
INPUT:	DC 48V
COLOR TEMPERATURE:	CCT
SMART MODULE:	2.4G



Suspended Hose Floodlight

LT26-GJ-1000-3000K/4000K

Black/White

DIMENSION:	L1000mm
MATERIAL:	Aluminum + Plastic
LUMINOUS FLUX:	877.4 Lm
POWER CONSUMPTION:	16 Watt
COLOR RENDERING:	Ra>90
LUMEN PER WATT:	53.4 Lm/Watt
LED CHIP:	Bridgelux
BEAM ANGLE:	360°
INPUT:	DC 48V
COLOR TEMPERATURE:	3000K/4000K




www.jinwang.com.sg



JW LIGHTS M BATHROOM
Blk69 Toa Payoh Lor 4 #01-371 S(310069)
+65 6980 5207 | +65 9878 2388

ULTRA-THIN MAGNETIC TRACK


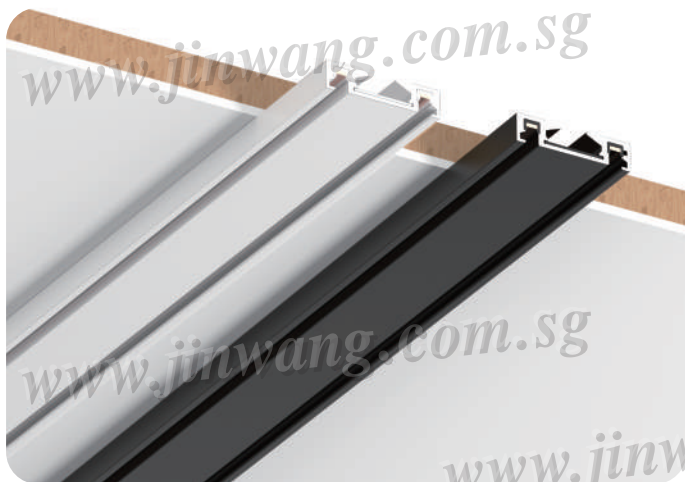


6mm Ultra-thin Magnetic Track Strip

Requires no false ceiling and offers a hassle-free installation. Simply screw the track directly to your wall or ceiling.


MODEL LENGTH FUNCTION

LT-26-A	1.5m/2m/3m	6mm-thick magnetic track for track lighting systems
LT-26-A-90°LV	26x26x26mm	vertical 90° track stitching fittings
LT-26-A-I	46x26x6mm	level track stitching fittings
LT-26-A-L	36x36x6mm	level 90° track stitching fittings
LT-26-A-T	46x36x6mm	T track stitching fittings
LT-26-A+	46x46x6mm	+ track stitching fittings

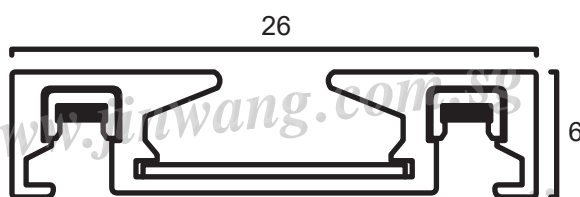

I Connector

LV Connector

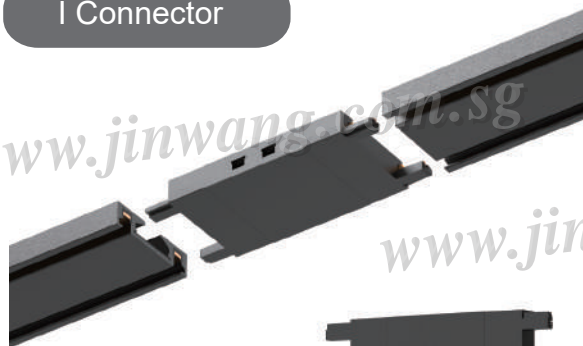

26mm

46mm

26mm

26mm



JW LIGHTS m BATHROOM


Blk69 Toa Payoh Lor 4 #01-371 S(310069)

+65 6980 5207 | +65 9878 2388


**ULTRA-THIN
MAGNETIC TRACK**

www.jinwang.com.sg




L Connector

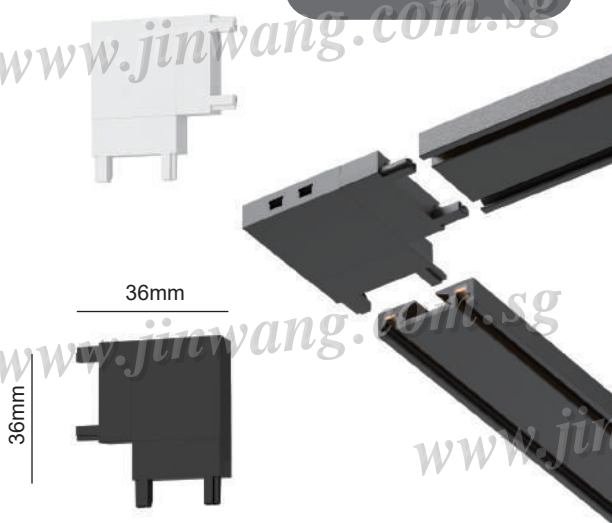

T Connector

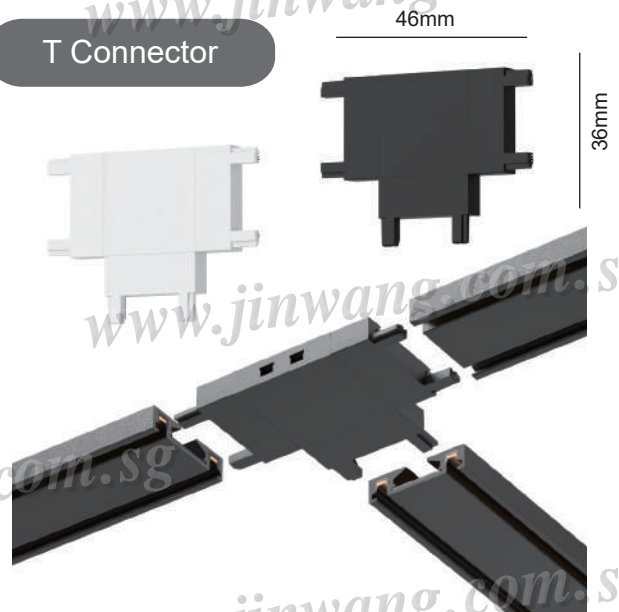

+ Connector

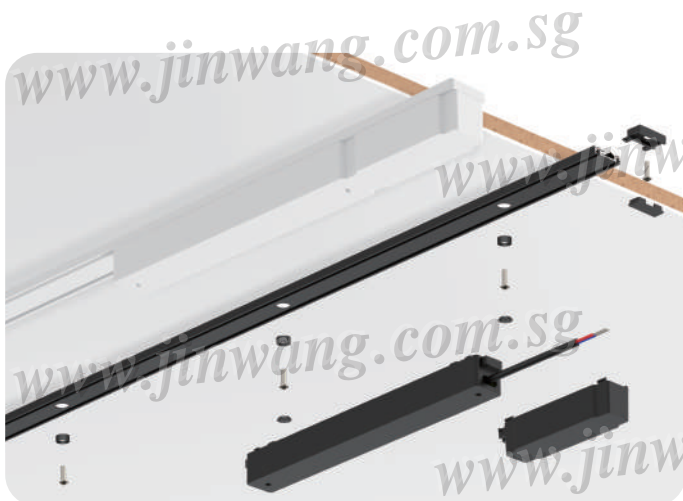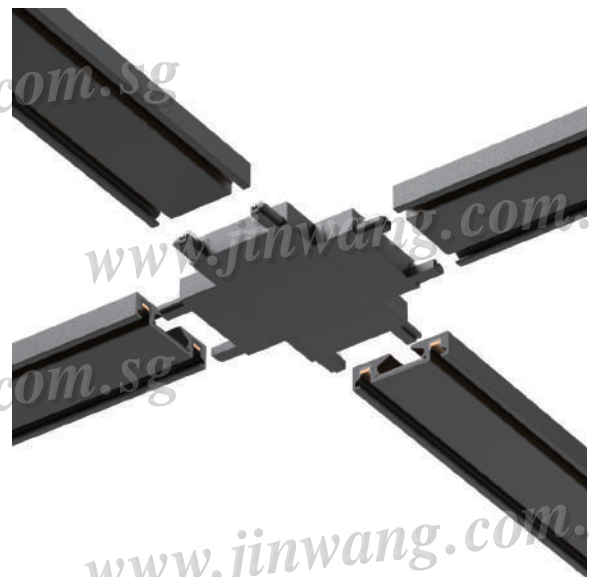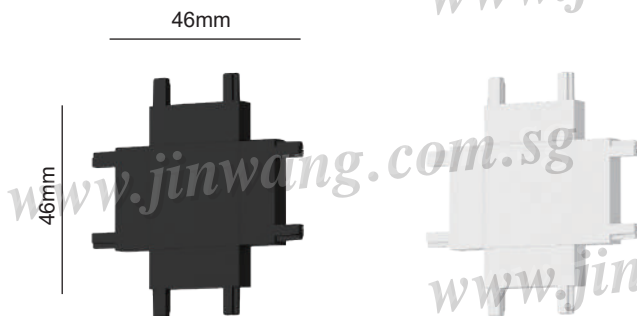

LT26-POWER SUPPLY
Black / White

LENGTH	POWER	INPUT
210x26x24mm	100W	DC 48V
230x26x24mm	200W	DC 48V

LT26-CXH-Wire Box
Black / White

LENGTH. 100x26x29mm